



City of Winters

Grant Avenue Design Guidelines

Adopted August 16, 2011



ACKNOWLEDGEMENTS

City Council

Woody Fridae--Mayor
Cecilia Aguiar-Curry --Mayor Pro Tem
Harold Anderson
Michael Martin
Tom Stone

Planning Commission

Pierre Neu --Chair
Glen DeVries --Vice Chair
Wade Cowan
Bruce Guelden
Corinne Martinez
Philip Meisch
Joe Tramontana

Economic Development Advisory Committee

Wade Cowan --Chair
Lisa Baker
Bill Biasi
Joe Castro
Debra DeAngelo
Bill Hailey
Chris Turkovich
Sandy Vickrey

City Staff

John W. Donlevy, Jr. --City Manager
Nelia C. Dyer --Community Development Director
Dawn Van Dyke --Management Analyst
Mary Jo Rodolfa-- Executive Assistant to the City Manager

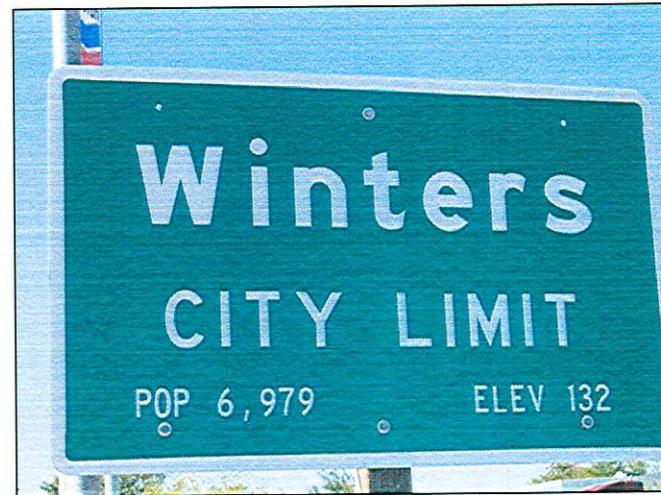


TABLE OF CONTENTS

1. Introduction
2. Site Planning
3. Architecture/Building Design
4. Connectivity
5. Signs
6. Landscaping
7. Lighting

Appendices

- A. Approval Process
- B. Pre-Approval Considerations
- C. Project Review Checklist
- D. Model Water Efficient Landscape Ordinance
- E. City of Winters Master Tree List



Introduction

Adopted on August 16, 2011, this Design Guide is the result of our efforts to assist you in developing and improving your property. We hope it helps you plan your exterior work within the Grant Avenue Business and Commercial District.

This Guide is dedicated to meeting our community expectations and assisting those involved with the development process of the Grant Avenue Business and Commercial District. The District is illustrated on the map on the following page and encompasses the Grant Avenue “gateway” into Winters.

The community expectations include the following:






- Maintenance of the existing small town feel
- Highest quality architectural, landscape and site development design
- High quality materials and craftsmanship
- Variety and diversity of architectural character that support the current interesting mixture of styles
- Small scale buildings with a strong architectural orientation
- The sensitive interface of commercial development with adjacent residential neighborhoods
- Strong encouragement of a unique Winters scale and character
- “Smart”, environmentally sensitive development which takes into consideration the proper use of materials, designs and techniques to advance sustainable development principles.
- Chain or franchise projects tailored to the unique qualities of Winters
- Maintenance of a sense of place with view of surrounding hills preserved
- Avoidance of architecturally trendy buildings in favor of more timeless qualities
- Thoughtful architectural design – not boxes with cosmetic attachments
- Unity of design treatment with all sides of the structure related to the design of the primary facades.
- Energy design in consideration of the CPUC’s goal of all commercial building achieving zero net energy use by 2030, and AB 32’s 2020 carbon emissions reduction goals.

All contributors to our community own part of our heritage – its past charm, present vitality, and future direction. With the guidelines contained in this document, our goal is to establish a balance that preserves and enhances the city’s livability while supporting the economic vitality that make Winters a complete community.

In addition, the guidelines are intended to accomplish the following:

- Provide clear guidance to property owners and design professionals in planning and designing new buildings and remodeling existing structures.
- Provide a greater degree of project review and approval predictability.
- Ensure that new development reinforces and supports the special qualities of the community of Winters.
- Maintain a building scale that is consistent with the community’s historical image and character.
- Provide information to facilitate the adaptation of corporate and franchise designs to comply with Winters design expectations.
- Reinforce the special qualities of the community’s visual character.
- Protect property owner investments by discouraging inappropriate adjacent development.
- Streamline the development review process by more clearly communicating community expectations to property owners and developers.

Please note that the mandatory development standards contain the words “shall, “ must,” or “will.” Standards that contain the word “should” mean that an action is required unless a determination is made that the intent of the standard is satisfied by other means.

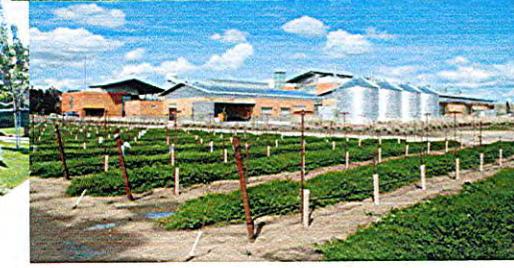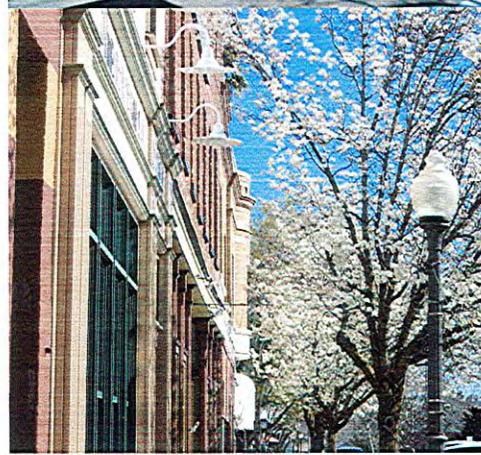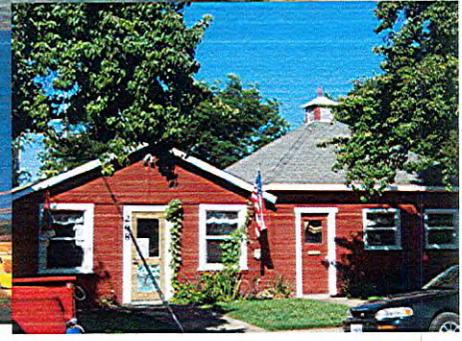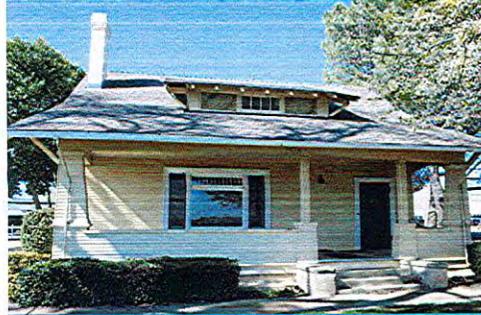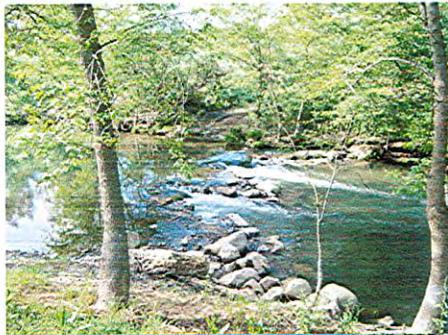

Site Planning

The City of Winters desires development in the corridor that is planned with strong consideration and thought given to building placement in relation to surrounding developments and the overall environment, allowing for safe ingress and egress, and including design that promotes an appearance that is unique to Winters. Developments should include, where appropriate, outdoor and public spaces. In addition, developments shall include screening enclosures for elements such as utilities, fire protection backflow preventers, service areas, trash enclosures and rooftop equipment. Overall, project sites shall be carefully planned to create and maintain a safe environment for pedestrians and bicyclists. Where stormwater drainage is a concern, developments shall include Low Impact Design features such as bioretention facilities, drainage swales and permeable pavements.

As a priority, developments shall, where feasible, include:

- Where appropriate, public, open or gathering spaces
- Limited conflicts between pedestrians, bicyclists, vehicles and utility/delivery vehicles
- Screening to cover trash enclosures, service areas, secure bike storage, and roof-top equipment
- Buildings sited in a manner that considers the surrounding environment
- On-site planning that encourages connectivity to off-site bicycle and pedestrian pathways
- Low Impact Design features, including bioretention facilities and permeable pavements
- Developments will be proactive and include transit in planning consideration

Community Spaces and Special Features

- All developed areas shall emphasize pedestrian orientation by creating attractive pedestrian spaces which utilize such features as plazas, ornamental gates, trellises, lighting, plant materials, seating, fountains and passageways through buildings via exterior and interior walkways.
- Pedestrian amenities, such as plazas, courtyards and other open spaces should be provided for spaces between buildings.
- Publicly-accessible plazas and open spaces are encouraged, where appropriate
- Plazas and open spaces shall be landscaped and incorporate high quality paving materials, such as bricks, stone, textured concrete block or tile.
- Outdoor pedestrian spaces shall include appropriate outdoor furniture, such as seating, walls, trash receptacles, bike racks and other elements.


- Paving, planting and other landscape materials should be coordinated with the design of the building, lighting and site.
- Owners of adjoining properties are encouraged to develop shared facilities, where possible.
- Certain projects may be required to install bike lockers per the California Green Building Standards Code (CalGreen Building Code).
- Per Section 5.106.5.2 (Designated Parking) of the 2010 CalGreen Building Code, a number of parking spaces for low-emitting, fuel-efficient, and carpool/van pool vehicles are required per total number of parking spaces for a development. Refer to Table 5.105.5.2 of the CalGreen Building Code.



Example of public open space shared by multiple businesses

Community Spaces and Special Features (Continued)

- When adjacent to street, outdoor areas shall be buffered with architectural features such as fountains and planting.
- Where practical, outdoor areas should be visible from public streets or trail networks and accessible from the building as well as the street or potential network.
- Outdoor furniture shall be coordinated with the theme of the building.
- Plant materials shall be of a drought-tolerant species as deemed by the CalGreen Code and provide variety, while being consistent with the architectural design of the building.
- All screening shall be designed as an integral part of the overall building design.
- Wall expanses should be protected from graffiti by adjacent plantings of shrubs or vines.

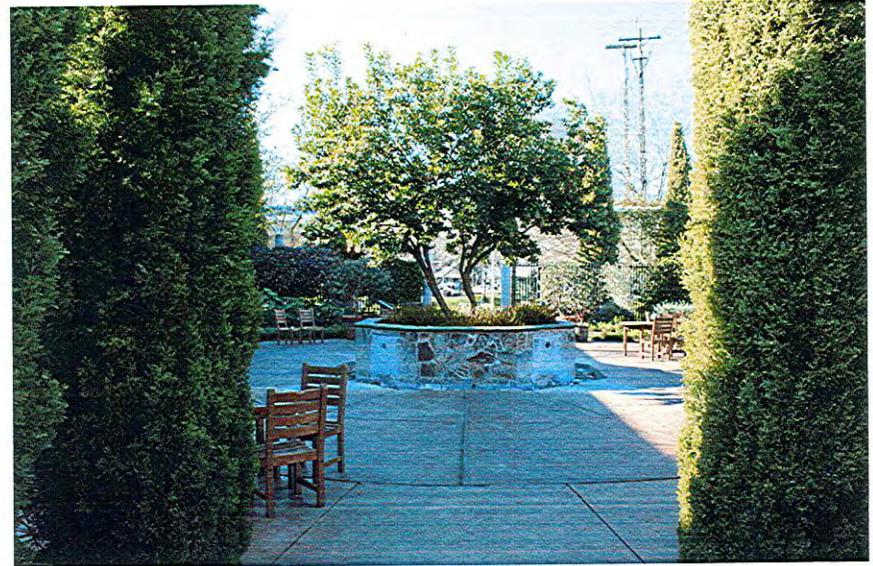

Example of an outdoor area buffered from the street by plantings

Outdoor Service and Storage Areas

- Lighting of outdoor service, loading and storage areas shall be the minimum necessary for security purposes and shall be designed and directed so as to meet night sky requirements in the Winters General Plan or lighting impacts at the street or on surrounding properties.
- Screening of these areas should be integrated into the overall building and landscape design. Screening may integrate lattice work, dense flowering vines, and additional architectural elements.

Outdoor Service and Storage Areas (Continued)

- Trash enclosures shall be of sufficient size to house the number and size of trash bins and containers needed to accommodate the waste generated by the building user(s), as required by the City's Solid Waste Ordinance and Planning and Zoning Code requirements. Trash bins shall be located within a trash enclosure at all times.
- All roof-mounted mechanical, electrical and external communication equipment, shall be screened from public view and architecturally integrated into the building design. Plans submitted for design review shall indicate how rooftop equipment will be screened.
- Service areas, garbage receptacles, utility meters and mechanical and electrical equipment shall to the maximum extent possible, be screened from public view and located for convenient access by service vehicles and public safety vehicles.



Example (above) of mechanical equipment not screened from public view



Example (above) of mechanical equipment appropriately screened from public view, with colors and materials matching adjacent buildings.

Building Siting and Orientation

- Buildings shall be sited to reinforce the public street network by incorporating active façades, with windows, doors and other architectural elements giving interest to the building from the corridor.
- Loading and service entrances shall not intrude upon the public view, nor interfere with pedestrian and vehicular flows within the project.
- In the Grant Avenue corridor, which is considered the city's gateway, care must be taken to create attractive public spaces and visual elements that represent Winters' heritage and character. Building masses shall be parallel to Grant Avenue and have a predominant east/west orientation.
- The street corners of corner sites are encouraged to be developed with buildings, public plazas or landscaped areas.
- Near corners, buildings should either be sited on the property lines or set back to provide a public open space, which provides direct access to the building or frames an open space between buildings.



Example of development where primary surface parking is located in front of building, an approach to avoid along Grant Avenue.

- Attractively landscaped areas may also be permitted where siting of a building's public open space at a corner is not feasible.
- Primary surface parking should be provided behind buildings with limited parking in the front or sides. Primary parking shall not be provided on the corner lots or in the frontage.

Building Siting and Orientation (Continued)

- Buildings located on corners shall include special design features and architectural features, which help to anchor the intersection.
- Significant site features, such as trees, agricultural vistas and views of surrounding mountains, shall be considered as design determinants in planning new developments.
- Where possible, outdoor parking areas should be divided into smaller units to decrease visual impacts associated with large expanses of pavement and vehicles, and to facilitate safe and efficient pedestrian movement between parking and buildings.
- Surface parking areas facing a public street shall be buffered through the use of berms or landscaping.



Surface parking area facing public street is not buffered in the photo above while photo below depicts parking area buffered by landscaping and attractive fence.



Drainage and Water Quality

When drainage on a site is a concern, Low Impact Design elements shall be considered including:

- Structure the development of a site so that the pre-development conditions are not altered excessively.
- Conservation and use of on-site natural features to protect water quality is required unless this condition can be met in another way.
- Swales are strongly recommended to reduce water quality impacts associated with site runoff. Drainage swales incorporated into landscape designs shall conform to the appropriate standards and guidelines for swales.



Example of water efficient landscapes (left and right)



Example of a drainage swale in a parking lot (above)



Compatibility/Coordination with Surrounding Properties

- While each development should be considered unique, compatibility with surrounding properties is encouraged to provide a visually pleasing corridor.
- Consider complementary pedestrian, bicycle and vehicle circulation to enable consistency and connectivity to offsite pathways.
- Applicants shall familiarize themselves with the City of Winters' Complete Streets Corridor Design document.
- Consider the natural environment and surrounding vistas when planning for building orientation.
- Development in the corridor should be reflective of the city's overall heritage.
- Consider transit accessibility (bus stops/routes) when developing site plan.



Proposed development should consider the characteristics of the surrounding area.

- Consider the characteristics of the surrounding area, including construction types, building heights, building orientation, driveways, service areas and public spaces.
- Significant site features, such as trees, agricultural vistas and views of surrounding mountains, shall be considered as design determinants in planning new developments.

Architecture and Building Design

The City desires development in the corridor that includes architecture and architectural details that reflect the overall character of Winters. Buildings need not adhere to one particular style or design. However, they should integrate features and/or materials that harmonize with the surroundings and the agricultural heritage that residents prize.

As a priority, include:

- Natural material including, but not limited to: brick, stone, wood, metal, and/or other materials that reflect Winters and its surroundings;
- Use of sustainable materials and practices is encouraged;
- Design to maintain and reinforce the unique scale and character of Winters;
- Dimensional relief to building facades and attention to detail on all sides of buildings;
- Buildings and design features scaled to human proportion.

General Building Design

- Building form and the type of construction materials used are significant factors in creating a development that is attractive and that fits in with the Winters community. While the City does not advocate or prescribe specific architectural styles or forms (e.g. contemporary vs. historical), it is appropriate for industrial or commercial building development to draw from local or regional design influences. As an example, predominant historical roof slopes do not exceed 8 in 12 pitch, nor are they less than 6 in 12 pitch.

- In multi-building complexes, a comprehensive architectural concept should be developed and maintained. Various site components should be unified through the use of similar design, materials, roof slopes and colors.

- Finish wall tops with overhangs, projecting cornices, and column caps that provide a strong visual terminus to the structure. Use applied and integrated design elements (e.g., exposed rafter tails on sloped roofs, cornice moldings, applied medallions, etc.)



Example of building that consists largely of boxes with design elements, an approach to avoid along Grant Avenue

- Avoid design which consists largely of boxes with applied design elements.
- Apply dimensional relief to building façade. Provide a number of facade layers (e.g., front of columns or pilasters, wall plane, window frame, and window glass).
- Maintain continuity of design, materials, color, form and architectural detail for all elevations of a building that are visible from public areas or adjacent residences.

Entries

- Building entries should be oriented toward the predominant public view, usually the street frontage. This allows the public to easily determine where the front entrance is located, and provides for a more attractive street frontage.
- Where possible, provide entries from Grant Avenue sidewalks as well as from the parking lot.
- Entries shall be designed to be consistent with the overall design, including colors and materials.
- Use transoms for natural lighting above ground floor doors and windows.



Example of attractive building entrance


Massing

- The height, width, and depth of a structure create the overall “massing” of a building. Achieving attractive massing for large structures is challenging, and requires creativity in architectural design. Appropriate building massing is achieved when it does not dominate building elevations with large blank walls. Large expanses of blank wall of any material are strongly discouraged. Use “Golden Mean” to determine building proportions and establish a base, middle, and top for building massing.
- Landscaping enhances architecture; however, building design should not rely on landscaping to soften, buffer or otherwise provide relief for massive building form.

Massing (Continued)

- Massing can be reduced through several methods including, but not limited to:

- Recessing floors above the first story;
- Providing vertical or horizontal offsets in the wall surfaces at regular intervals, including columns, projections, and recesses;
- Reducing the overall size of buildings;
- Incorporating other structures on the site with varying sizes;
- Articulating details around doors, windows, balconies, exposed expansion joints, reveals, change in texture, or other methods of visual relief;
- Avoiding long, repetitive, monotonous facades, including those that repeat the same design element several times along the same elevation;
- Reducing overly large and tall roof designs;

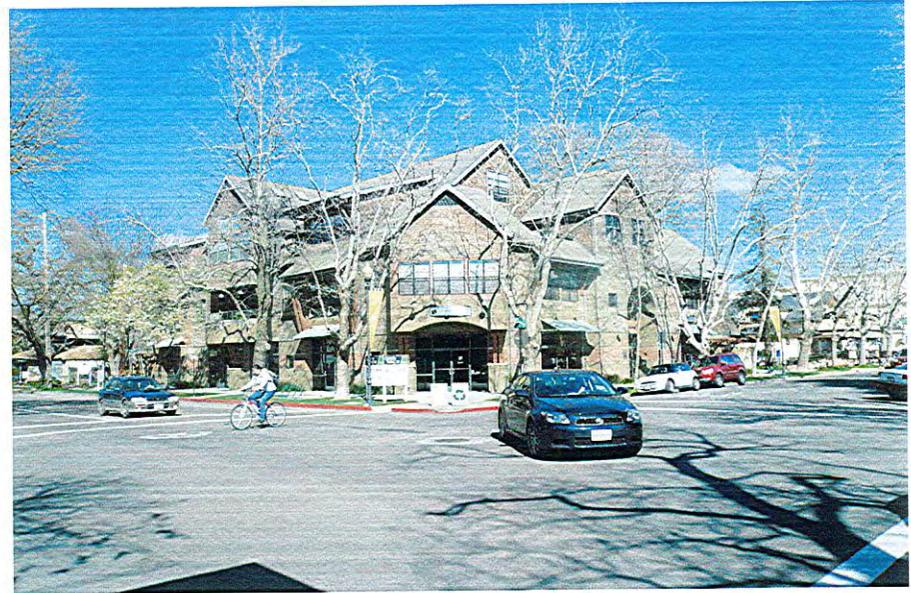

Massing is reduced on the building in the photo above through recessing floors above and providing horizontal and vertical offsets.

- Vary facades at least every 50 feet;
- Use arcade and gallery frontage where applicable at public area;
- Ground floor heights shall be 14 to 20 feet.

Building Materials and Colors

- The use of high quality, natural materials including wood, stucco, stone or brick, is encouraged.
- Utilize colors that are appropriate to the use and the surrounding area.
- Muted tones are generally preferred with stronger accent colors limited to smaller areas of trim.
- Thoughtful consideration shall be given to the selection of color hues. Muted tones of blues, yellows, tans, grays, and other hues shall be considered.
- A range of analogous or complementary colors is preferred over painting all wall surfaces with the same paint, color and shade.
- Vinyl and aluminum are not acceptable finish materials.



The building in the photo above was constructed in a Sacramento foothill community. A variety of materials and colors were used that are appropriate for the area.


- The use of “green” or “low maintenance” materials for siding and trim such as fiber cement sidings and PVC/fiber cement/composite trims are encouraged.

Energy Efficient and Sustainable Design

The City of Winters supports sustainable design in the construction of new facilities and the remodeling of existing buildings. Applicants are expected to utilize creativity in adapting sustainable and energy efficient design elements. City staff will work closely with applicants to achieve this goal.

Energy efficient and sustainable design may be demonstrated in the following areas:

- Use of energy efficient HVAC systems
- Use of cool roofs and building orientation
- Use of solar energy
- Smart building orientation
- Reduction of energy demands through simple techniques such as efficient windows and sun control methods
- Use of recycled materials
- Increase insulation and energy efficient lighting
- Use of passive solar design
- Use of operable windows

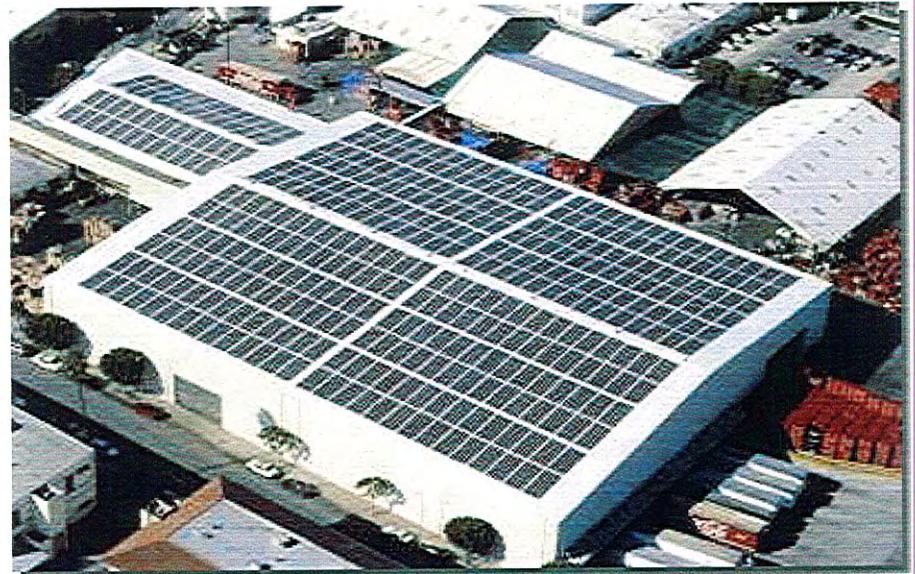

Example of commercial building with roof-mounted photovoltaic energy system

General Consideration of Surrounding Area

- Views to the surrounding hills should be maintained.
- Building scale shall be set back along the street, in order to retain the views of the corridor, especially the Vaca Mountains. Structures over one story shall be designed to minimize their visual bulk and relate to the human scale of pedestrians on the street.
- Projects shall be designed to meet their functional needs, but will be expected to reflect Winters unique qualities of small scale, pedestrian friendliness, and attention to architectural detail.
- Chain or franchise uses shall adapt their exterior standard designs and materials to the unique qualities of Winters.



Example of buildings (above and below) that reflect the qualities of the locale



Connectivity

The City of Winters desires development that provides for the inter-connectivity of, pedestrian, bicycle and vehicles within the Grant Avenue Corridor, including, but not limited to: pedestrian/bike facilities, connection to designated walkway and bikeway systems, and transitions between developments and roadways that eliminate conflicts between these uses and maximize utilization of these facilities.

In proposing a project, applicants shall consider and demonstrate how the development will connect with:

- Grant Avenue Complete Streets Concept Plan
- Class I and II Bicycle Lanes
- Pedestrian/bicycle facilities within the project and with bordering facilities
- Putah Creek Park Master Plan and Trail System

As a priority, developments should:

- Provide direct connection with bicycle/pedestrian facilities that border the project site
- Minimize bicycle/pedestrian and vehicular conflicts within and external to the project
- Reduce vehicular ingress/egress from the project
- Create effective circulation/flow within the project

Vehicular Circulation

- Provide separate vehicular and pedestrian circulation systems with a strong emphasis on pedestrian linkages between uses.
- Use design elements that are visually interesting and consistent with other streetscape materials used in the overall development and those planned for Grant Avenue/SR 128.
- The City of Winters wishes to minimize conflicts for excessive ingress/egress locations along Grant Avenue. Projects shall consider alternatives to Grant Avenue such as arterials (East Main Street, Timbercrest Road, Morgan Street or Walnut Avenue).



Example of intersection with visually interesting design elements



Example of streetscape concept plan for Grant Avenue/SR 128

- Locate additional site access points as far as possible from street intersections to minimize conflicts. More than one access to a site from a public street may be permitted when the additional access will not be hazardous to the safety and operation of the street or pedestrians and when it facilitates the integration of the commercial development into the community.
- When the opportunity exists, provide common or shared entries.

Passenger Drop Off Areas

- Design drop-off lanes so as not to obstruct traffic flow when motorists are stopped to deliver passengers.
- Provide a clear separation of vehicular traffic between drop-off zones and access to a parking lot.
- Use colors and textures in the parking area that are distinguishable from the travel lane at the drop off area.
- Use signs to indicate “drop-off zone” or “passenger loading only”.



Example of passenger drop-off area with adequate ADA accessible parking spaces

Bicycle Circulation and Parking

- Bicycle paths and routes shall be designed to provide continuous circulation through the site separated from vehicle travel ways, wherever feasible.
- Per CalGreen Code, certain projects shall furnish off-street bicycle parking/kiosks to encourage the use of alternative transportation modes. These facilities shall be designed to accommodate the trip purpose of the different bicycle users.



Bicycle parking furnished on a street corner



Bicycle/Pedestrian connection along a creek

- The maintenance roadways of the proposed combination greenbelt and drainage channel identified in the Moody Slough Subbasin Drainage Report shall be designed to share bicycle and pedestrian connection from Grant Avenue/SR 128 to the multi-use trail within the Putah Creek Nature Park.

Pedestrian Circulation

- Continuous pedestrian walkways shall be provided to connect the public sidewalk to the principal customer entrances at each tenant space. Drive aisles should not be used as pedestrian walkways.
- Sidewalks and pedestrian ways shall be scaled to the use and expectations of pedestrian volumes in any given location with the minimum width of the sidewalk and pedestrian ways no less than 5 feet, and no less than 8 feet where multi-use is proposed.
- Walkways should be shaded and landscaped.
- Paths with durable, all-weather surfaces shall be located across medians and other landscaped areas, as necessary to provide convenient pedestrian routes and reduce wear on landscaped areas. The use of hard surface decomposed granite and/or permeable concrete is strongly encouraged.



Example of a bicycle /pedestrian facility

Pedestrian Circulation (Continued)

- Pedestrian connections should be provided between buildings and adjoining commercial sites.
- Sidewalks shall connect areas of pedestrian activity such as street crossings, building and store entrances, bicycle racks and secure storage, and adjoining landscaped areas that include trees, shrubs, lighting, signage, benches, flowerbeds, or other similar amenities.
- Primary circulation paths must meet all accessibility requirements and avoid excessive steps or level changes in order to reduce potential tripping hazards and facilitate circulation for all potential users.
- Where walkways cross on-site driveways, special design features should be used to increase safety for the pedestrian. Potential design features include elevated crosswalks (raised to the level of the sidewalk) and curb extension to narrow the travel lane or low-level lighting, such as a bollard light.




Two examples (above and below) of pedestrian walkways separate from the drive aisles



Signs

Signs in the Grant Avenue Corridor area are regulated by Chapter 17.80 (Signs) of the Winters Municipal Code. The following design standards are intended to guide the design of signs in the Grant Avenue Corridor area and will be used as a basis of consideration for review of sign permits and management of signs in the area.

As a priority, developments shall include signs that are designed in harmony with the style and character of the development and as an integral component of the building architecture, building materials, landscaping, and overall site development. Signs that are compatible with the surroundings and effectively communicate a message will promote a quality visual environment.

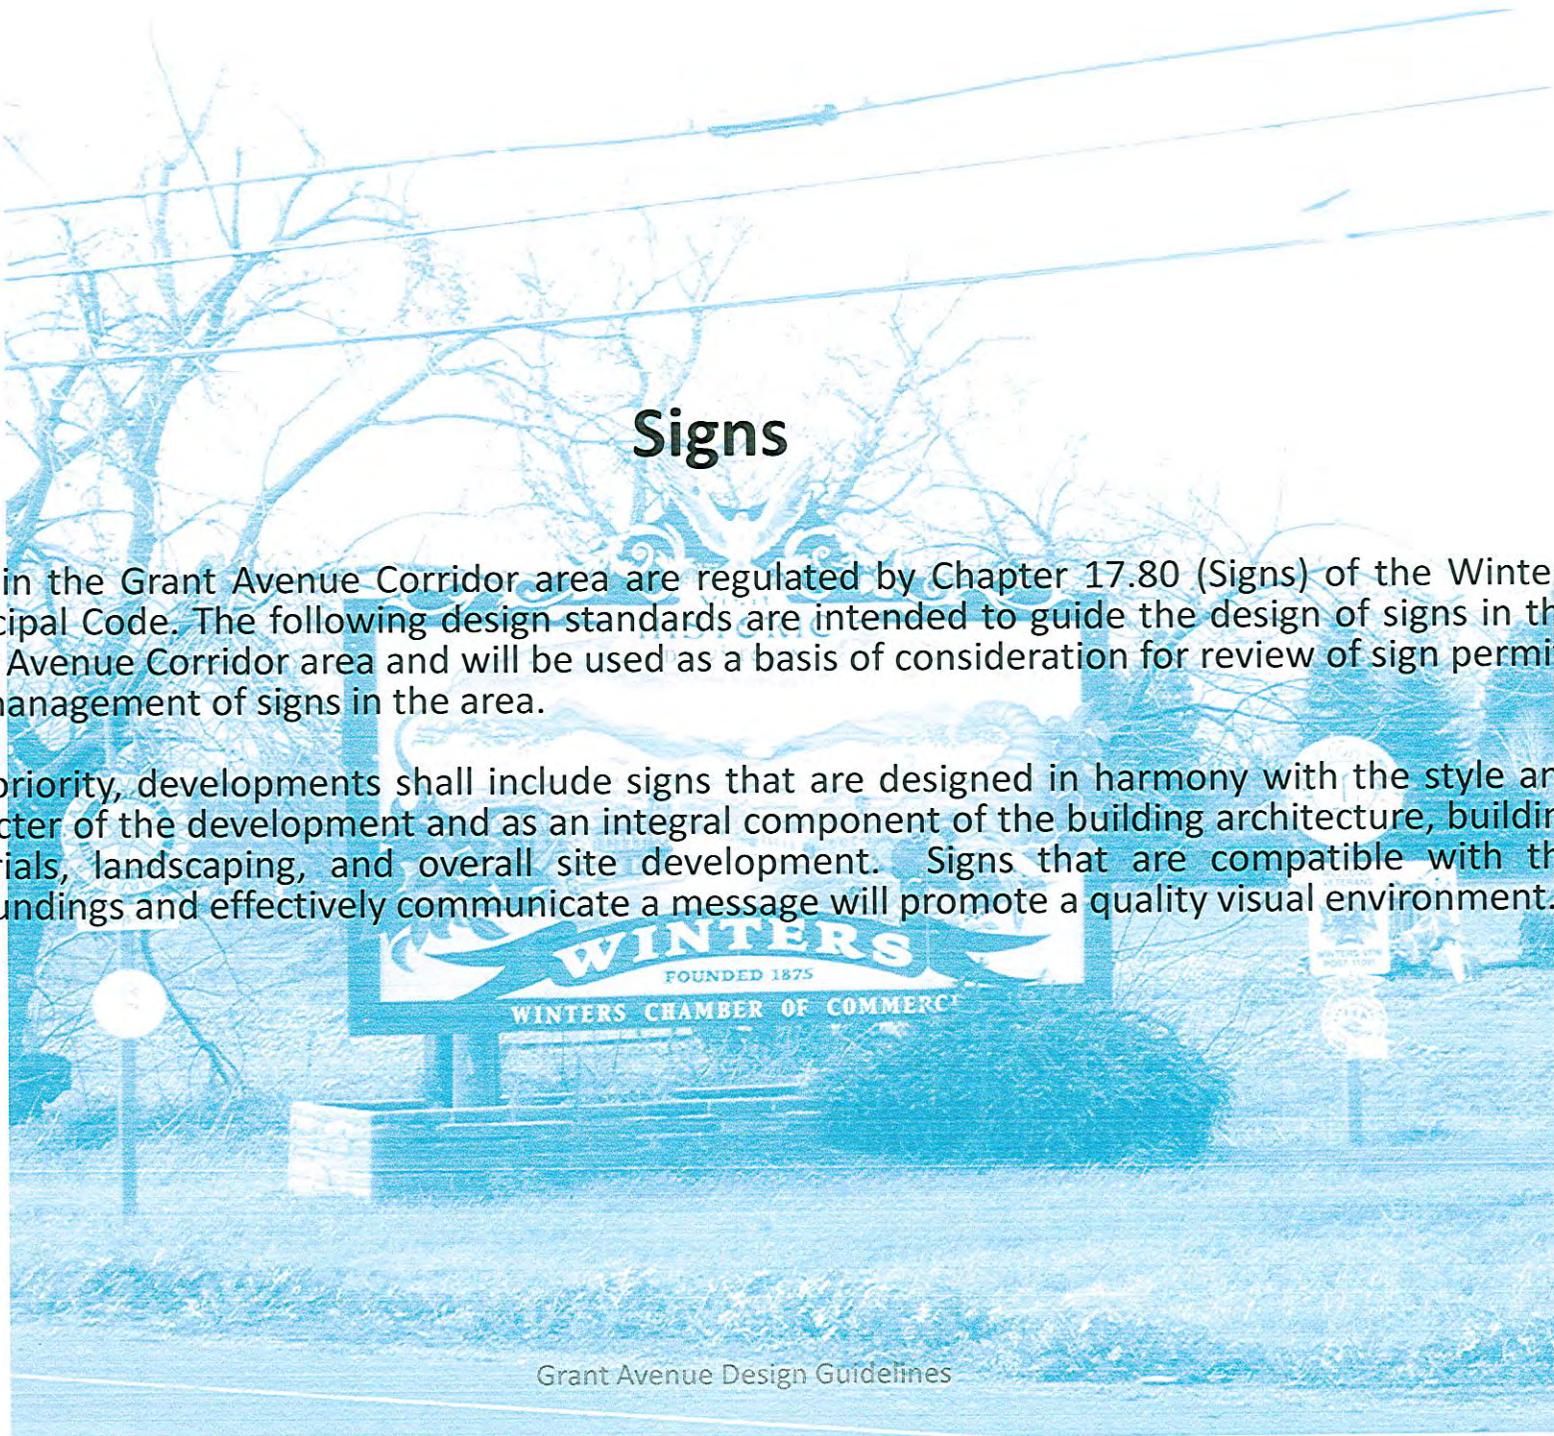

General Design Standards

- Sign letters and materials shall be professionally designed and fabricated.
- Exposed conduit and tubing (raceway) are prohibited. All transformers and other equipment shall be concealed.
- All signs shall be maintained in good repair, including the display surface, which shall be kept neatly painted or posted.
- The exposed backs of all signs visible to the public shall be suitably detailed, finished and maintained.
- The use of retractable or fixed awnings as a signage tool is acceptable.
- The light source for externally illuminated signs must be positioned so that light does not shine directly on adjoining properties or cause glare or shine in the eyes of motorists, bicyclists or pedestrians.



Example of wall sign that is proportionate with the building

Placement

- Signs should be generally free of obstructions when viewed from different angles. However, trees, shrubs or other landscaping that grow to a point that they obstruct the view of a sign or make it illegible shall not be grounds for removal of the plant(s).
- Utilize a consistent proportion of signage to building scale, such as one-third text to two-thirds wall area or one-quarter text to three-quarters wall area.

Materials and Colors

- Paper and cloth signs are appropriate for interior temporary use only and are not permitted on the exterior of a building.
- The use of neon is permitted if it fits with the style of the architecture (e.g., art deco) and is not a nuisance (e.g., produces glare) to the surrounding properties.
- Signs shall be constructed using exterior materials, finishes, and colors in harmony with, or an upgrade to, those of the buildings or structures on site.
- The selected materials need to contribute to the legibility of the sign. For example, glossy finishes are often difficult to read because of glare and reflections.
- Contrast is an important influence on the legibility of signs. Light letters on a dark background or dark letters on a light background are most legible.



Example of a pole sign, which is not permitted along Grant Avenue

Prohibited Signs

- Beyond those already permitted by the City of Winters sign ordinance, no individual pole signs or A-frame signs shall be permitted in the Grant Avenue Corridor area.

Sign Illumination




- The light from an illuminated sign shall not be of an intensity or brightness that will create glare or other negative impact on residential properties in direct line of sight to the sign.
- Whenever indirect lighting fixtures are used (fluorescent or incandescent), care shall be taken to properly shield the light source to prevent glare from spilling over into residential areas and any public right-of-way.
- Internally illuminated plastic box “canned” signs are prohibited. Individually illuminated channel letters are acceptable.
- Signs shall not have blinking, flashing, or fluttering lights, or other illumination devices that have a changing light intensity, brightness, or color.
- Light sources shall utilize energy-efficient fixtures to the greatest extent possible and shall comply with Title 24 of the California Code of Regulations (California Building Standards Code).
- Backlit, cut-out signage is encouraged.



Example of a streetscape cluttered with signs, an approach unacceptable along Grant Avenue

Sign Legibility

- Avoid spacing letters and words too close together. Crowding of letters, words or lines will make any sign more difficult to read. Conversely, over-spacing these elements causes the viewer to read each item individually, again obscuring the message. As a general rule, letters should not occupy more than seventy-five (75) percent of the sign panel area.

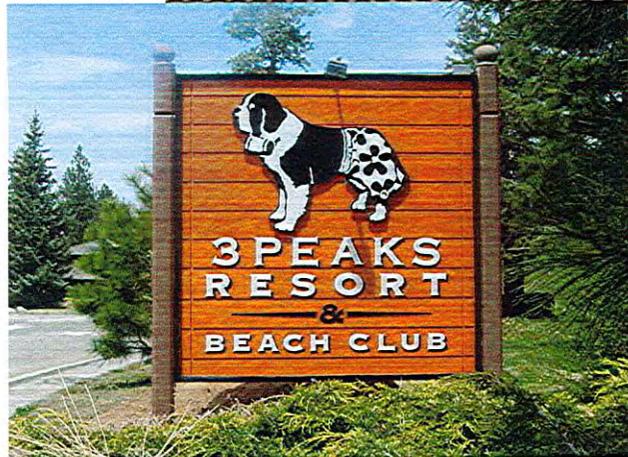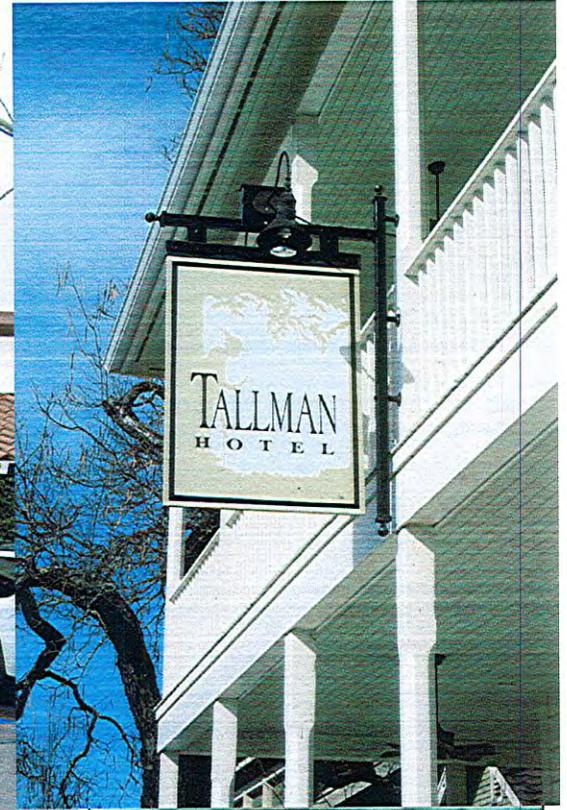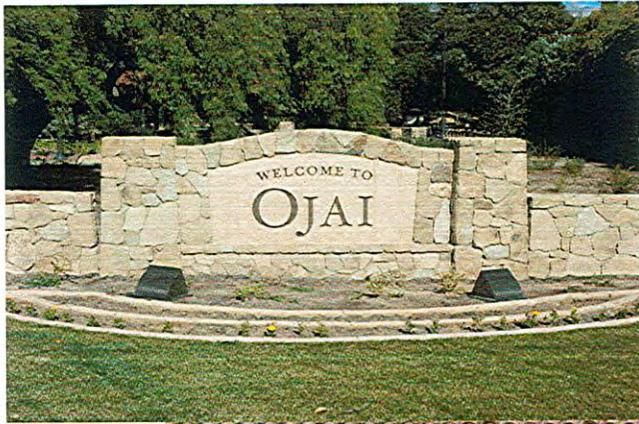

Landscaping

Landscaping in the Grant Avenue Corridor area is regulated by Chapter 17.76 (Landscaping and Irrigation) of the Winters Municipal Code, the State's Model Water Efficient Landscape Ordinance, and the California Green Building Standards Code. The following design standards are intended to guide the design of landscaping on properties in the Grant Avenue Corridor area and will be used as a basis of consideration for review of landscape plans in the area.

The City of Winters desires development in the corridor that includes landscaping that enhances sites within the Grant Avenue Corridor, minimizes adverse visual and environmental impacts of large structures and paved areas, promote the conservation of water, and to provide microclimate control for energy conservation where possible.

As a priority, developments shall:

- Follow/comply with the State's Model Water Efficient Landscape Ordinance and the California Green Building Standards Code (CalGreen Code);
- Enhance the overall appearance of the project, unify outdoor spaces and preserve view corridors while taking into consideration climatic conditions and the natural environment of Winters.

Design


- Landscape plans shall exhibit an overall design concept.
- Plant materials should be used in a logical, orderly manner, helping to define spaces and complement adjacent architecture.
- Landscape designs should be coordinated between the areas of a development. However, all areas within a project need not be identical.
- Different landscape themes may be utilized in larger developments to distinguish spaces from one another; however, these themes should be consistent with a unifying concept that establishes a cohesive design throughout the project.

Site Furnishings and Features

- Landscape plans should incorporate various site furnishings and features.
- Lighting, seating, paving, fountains and other features shall be considered integral components of the landscape plan and included in the overall landscape concept.



Example of buildings with landscaping and site furnishings

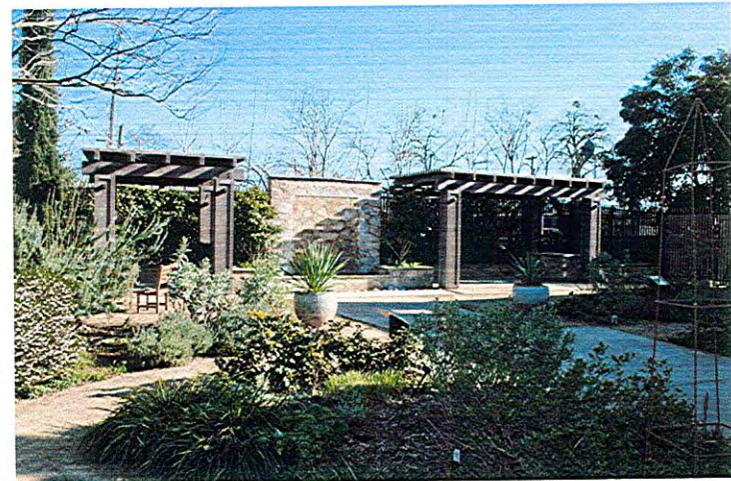

Scale

- The scale and character of the landscape materials to be selected should be appropriate to the site and/or architecture. Large-scale structures or projects require large-scale landscaping treatments.

Trees

- Mature, existing trees should be incorporated into landscape plans, wherever possible and accordance with City's Tree Ordinance. Specimen trees or groupings of existing trees can provide a new development with immediate character. They should be considered as design elements.


- In the absence of existing trees, those used should be no less than 24X24 boxed specimen trees.

- Per Section 17.76.040 (C) of the Winters Municipal Code, landscaping of parking lots shall provide for fifty (50) percent tree canopy coverage or shading of the entire lot within fifteen (15) years of tree installation.

- Utilize the City of Winters tree palette.

Arbor, planters, and trellises

- Landscaping incorporated into a buildings' architectural design (e.g., arbors, planters, trellises, atriums, etc.) is encouraged.

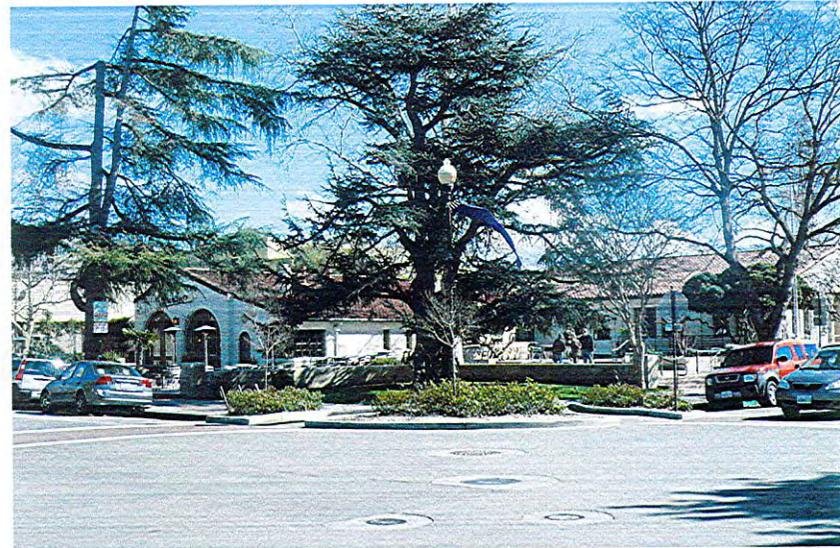


Mature trees were incorporated into the renovation of the building shown above.

Entrances and walkways

- Site landscaping should be used to define entrances and walkways, to screen parking and loading areas, for micro-climate control, and to enhance views of the site from inside a structure.
- Landscape should be professionally designed and meet CalGreen Code standards. The use of water conserving plantings, such as California natives and drought tolerant trees, shrubs, and turfs, is encouraged.



Examples of water conserving plantings

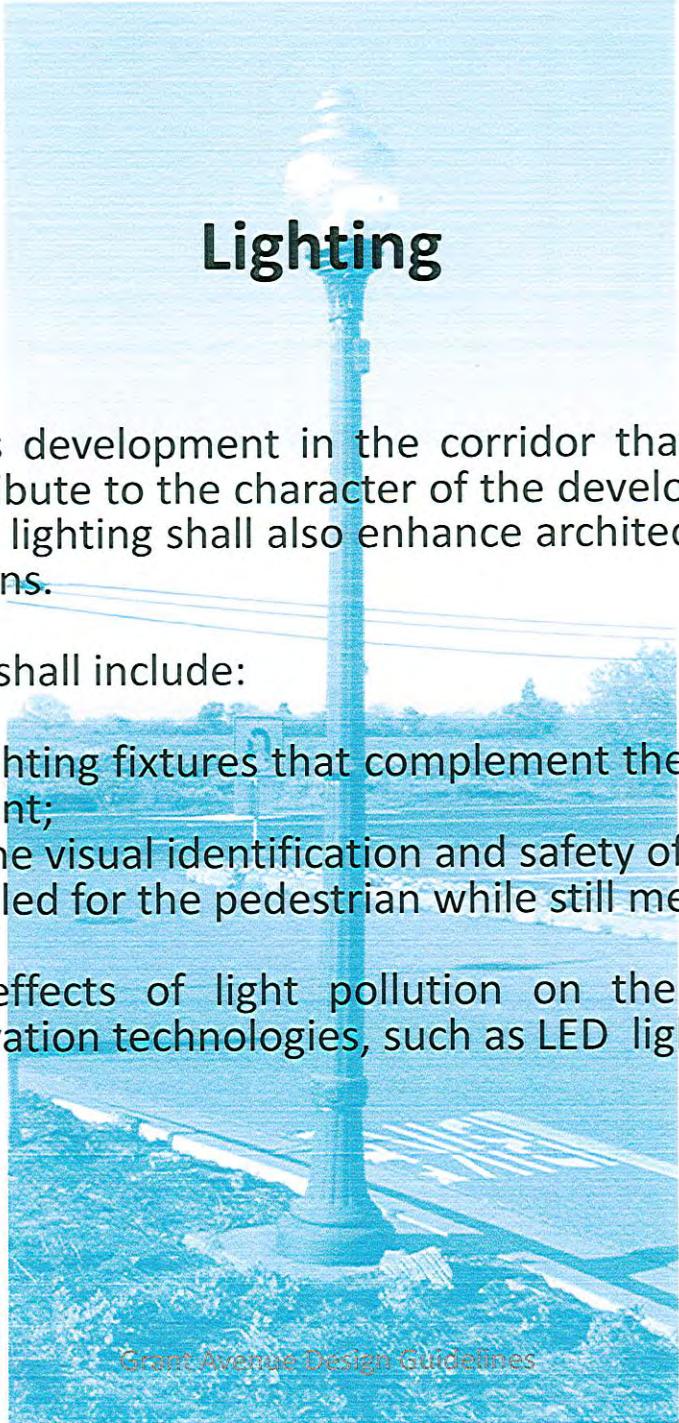

Lighting


The City of Winters desires development in the corridor that includes lighting and the design of fixtures that contribute to the character of the development while not impacting adjacent development. Site lighting shall also enhance architecture and landscape design, and address dark sky concerns.

As a priority, developments shall include:

- Attractively designed lighting fixtures that complement the architecture of the project and surrounding development;
- Lighting that improves the visual identification and safety of businesses;
- Street lighting that is scaled for the pedestrian while still meeting vehicular needs;
- Consideration to the effects of light pollution on the environment, as well as utilization of energy conservation technologies, such as LED lighting.

Design

- Exterior lighting shall be designed as an integral part of the building and landscape design. Decorative lighting fixtures, such as gooseneck lighting or antique style, are strongly encouraged.
- Site plans and architectural plans shall include the location of fixtures, their design and the nature and level of the illumination they will provide. Lighting shall be designed to include cut-offs to eliminate the negative effects of lighting the night sky.
- Illumination levels shall be provided to address security concerns, especially for parking lots, service areas, pedestrian paths, outdoor gathering spaces, at building entries and any other pedestrian accessible areas.

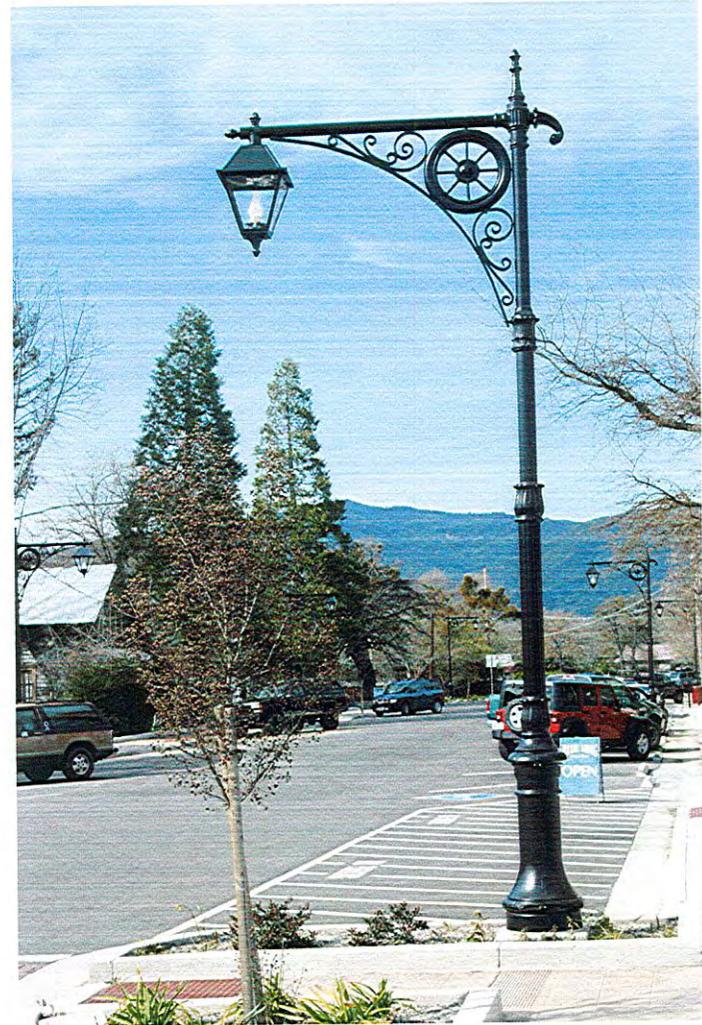

Example of decorative street lighting directed downward to avoid lighting of the night sky.

Area of Illumination

- Lighting shall be located so as to minimize the impact of lighting upon adjacent buildings and properties, especially residential uses.
- In general, the location of lighting should respond to the anticipated use and not exceed the amount of illumination required by users.
- Illumination over an entire area or use of overly bright lighting is strongly discouraged.
- The placement of light standards, whether for street lights or landscape lights, shall not interfere with pedestrian movement.
- Lighting for pedestrian safety shall illuminate changes in grade, path intersections and other areas along paths which, if left unlit, would cause the user to feel insecure. Recommended minimum levels of illumination along pedestrian paths between destinations is 0.5 foot-candles. At pedestrian destination points such as entryways, plazas and courtyards, lighting levels should typically achieve illumination of 1 foot-candle, per current code.



Examples (above and below) of bollard lighting along a path, which provide for safe pedestrian movement



Parking Area Illumination

- Illumination should be concentrated along the pedestrian paths leading to parking areas and in the specific areas where cars are parked.
- Illumination should achieve a lighting level of 1 foot-candle on the parking lot surface.

Lighting Height

- The height of luminaries shall be to scale with the building and site design and in no case shall they exceed 16 feet in height from grade.
- Lighting sources should be kept as low to the ground as possible while ensuring safe and functional levels of illumination.
- Area lighting shall be directed downward or employ control features so as to avoid light being directed offsite as well as to avoid lighting of the night sky.



Example of a parking lot with illumination that appears to exceed lighting levels, an approach to avoid along Grant Avenue.

Prohibited Lighting

- No outdoor lights shall be permitted that blink, flash or increase lighting intensity.



APPENDIX A

Approval Process

APPROVAL PROCESS

An important objective of the design review procedure is to better coordinate the processing of your development plans prior to obtaining your building permit. This includes streamlining the process to minimize the steps and hurdles in the path to completion of your project. The process outlined here is provided to inform you of how our design review system works from start to finish. We hope it will assist you in understanding what will occur when your project is proposed in the Grant Avenue Business and Commercial District.

In Appendix B, you will find a checklist of general considerations. You will want to review the checklist once you have reviewed the Guide to determine the compatibility of your project with the District's design goals.

Steps of the Approval Process

Step 1: Schedule a meeting with the Community Development Department staff and request information to answer the following questions:

- a. What do I need to apply for development?
- b. Is my project consistent with the General Plan Policies and Zoning Ordinance Standards?
- c. What is the approval process? How much time is involved?
- d. Is my project in the Grant Avenue Business and Commercial District? Are the Design Guidelines applicable to my project? What types of requirements are likely to be imposed?
- e. Do I need encroachment permits for outdoor activities in the public right-of-way?

Step 2: Submit a completed planning application along with the necessary plans, materials, and application fee(s) to the Community Development Department. Staff will determine whether the application for your project is complete.

Step 3: Upon receipt of a complete application, staff will route the project plans and materials to multiple City departments for their review and comment. In some cases, due to environmental regulations, the project may also be routed to State and Federal agencies such as the Army Corps of Engineers, U.S. Fish & Wildlife, and the California Department of Transportation (Caltrans) or others for review and comment.

Step 4: Upon discretion of the Community Development Director, you may be required to present the site plan of your project to the Planning Commission for conceptual design review. Conceptual design review shall be considered only as an informational item and is intended to provide informal feedback to you. Planning Commission review and comments stemming from conceptual design review would be only advisory in nature.

Step 5: Within 30 days of submitting your application, staff will hold a project evaluation meeting with multiple City departments to discuss the project's site/design issues. You, your engineer, and your architect may attend this meeting as well. After the meeting, city staff will compile written comments from each department (engineering, building, etc.) on the project as well as a draft set of recommended conditions of approval and provide it to you. In some cases, the written comments require modifications to the project plans.

Step 6: If following the meeting the project is modified, you are responsible for responding to each department's comments and making sure that each department's comments are adequately addressed before submitting revised plans.

Step 7: Submit the revised plans to the Community Development Department for redistribution to the applicable Departments for their review and finalization of the project Conditions of Approval.

Step 8: Once all departments have reviewed the revised project plans, staff prepares the final Conditions of Approval. These Conditions of Approval will be included within the staff report that is forwarded to the approving authority for their review and consideration. At this step, staff also prepares the necessary environmental documentation schedules the public hearing for the project.

Step 9: Staff will prepare a Public Hearing notice for the project. The public hearing notice will be sent to property owners within a 300 foot radius of the project and to the Winters Express for publication. At the same time, staff will prepare and finalize your project's staff report. Please note, your staff report may include recommendations related to any outstanding design and/or site issues not fully addressed on the project plans. This staff report is then forwarded to the approving authority for their review and consideration.

Step 10: At the public hearing, testimony is heard on the project and the approving authority will take a final action on the project. When the approving authority approves your application, the discretionary review process is complete and you may apply for a building permit following the ten (10) day appeal period. You must comply with all conditions of approval. Should the approving authority disapprove your application, you may resubmit a modified application or appeal the decision to the Winters City Council within 10 days of the decision.

PLEASE NOTE: Permits for new development that include land use and/or zoning issues such as General Plan amendments and rezones require three public hearings (one Planning Commission meeting and two City Council meetings). In these cases, the City Council is the final approving authority.

APPENDIX B

Pre-Approval Considerations

PRE-APPROVAL CONSIDERATIONS

Now that you have reviewed the guide, apply these questions to your proposed plans before you submit your application. If you can answer yes to all of these questions, your plans have a very good chance for approval. If you have to answer no to any of these questions, you may want to reevaluate your plans in light of the goals and criteria of the Design Guidelines. We encourage your design creativity and look forward to working with you.

1. Do your plans relate favorably to the surrounding area?
2. Do your plans contribute to the improvement of the overall character of the City?
3. Do your plans fit as much as is reasonable with the building's original design?
4. Are the changes or new construction proposed in your plans, visible to the public and architecturally interesting?
5. Does your project proposed a use consistent with the surrounding uses and businesses?
6. Are all materials proposed in your plans appropriate to the neighborhood?
7. Do your plans include landscaping and design to enhance the pedestrian environment?
8. Have your plans been designed in accordance with the guidelines set forth in this booklet?

APPENDIX C

Project Review Checklist

City of Winters – Grant Avenue Business and Commercial District Design Guidelines Project Review Checklist

The City Council on August 16, 2011 adopted the following Checklist which is intended to assist developers, staff, policy boards, and the public in determining project consistency with the Grant Avenue Business and Commercial District Design Guidelines. Please refer to the Guidelines for the full text and illustrations, as the Checklist does not supersede or substitute for the Guidelines. The information in parentheses provides examples of ways to achieve the desired effects, recognizing that it is impossible to reduce the art and practice of design into a checklist of individual elements.

Discussion of Design Elements: Applicants are requested to discuss the following issues in their project application submittal.

1. How does the project design contribute to the improvement of the City's physical image? How does the project exhibit creativity?
2. What architectural style(s)/period is represented by the project design, if any?
3. After completing the checklist below, explain how the project complies with the various factors below.
4. Are any of the criteria below not met? If so, why not?

Yes	No	N/A	Yes – consistent; No- Not consistent or more info needed; N/A – not applicable
			Site Planning
			The proposed buildings are sited in a manner that considers the surrounding environment.
			The development includes limited conflicts between pedestrians, bicyclists, vehicles and utility/delivery vehicles.
			Public, open or gathering spaces are included, where appropriate.
			Low impact design features, such as bioretention facility, rain gardens, and permeable pavements are included in the proposed development.
			Consideration for transit facilities is included in the proposed development.
			On-site Planning encourages connectivity to off-site bicycle and pedestrian pathways.
			Architecture
			Design of proposed buildings reflect Winters and its surroundings (<i>compatible materials, colors, quality, coordinated but not the same as properties in Winters, avoid strong or vivid colors unless they fit within local context, concrete block/exposed concrete on visible walls finished in aesthetic manner</i>).
			Buildings and design features are scaled to human proportion.
			Buildings exhibit variety and distinctiveness (<i>but avoid overly obtrusive or overly monotonous designs, or strong contrast with adjacent buildings, creative use of natural or recycled materials</i>).
			Variety of architectural features encouraged tied to comprehensive design theme (<i>arches, raised parapets, cornices, eaves, windows, balconies, entry insets, roof angles and pitches, wall relief features</i>).
			Site and buildings are visually attractive from neighboring properties, traffic and corridors, and public spaces (<i>service areas and devices screened, integrated and compatible with site features; above criteria is applied to areas visible to public view; rear and side views are visually interesting, coordinated, and well-maintained</i>).
			Connectivity
			The proposed development connects with:
			- Grant Avenue Complete Streets Concept Plan
			- Class I and II Bicycle Lanes
			- Pedestrian/bicycle facilities within the project and with bordering facilities
			- Putah Creek Park Master Plan and Trail System
			Pedestrian elements are attractive and functional (<i>walkways link parking to building entrances and other walkways; planters, street furniture, outdoor seating, pedestrian oriented signs, low level lighting provided</i>).
			Parking areas include a defined sidewalk or marked pedestrian facilities in landscaped areas or separated from traffic lanes required.
			The project provides connections for walkers and bicyclists to the surrounding community (<i>provides walking/biking facilities on the site, connects to walking/biking facilities in town, provides shortcuts for walkers/bikers</i>).
			Sidewalks provide are convenient and safe access (<i>sidewalks sufficiently wide, without obstruction; curbs, shade, lighting provided; buffers between walkers and traffic provided; safe and direct street crossings for walkers</i>).
			Entrances provide convenient access (<i>entrances adjacent to street, minimal setback, routes are well marked, sidewalks provide uninterrupted access to entrances, safe</i>

Yes	No	N/A	Yes – consistent; No- Not consistent or more info needed; N/A – not applicable
			<i>bike parking is located to entrances).</i>
			Landscaping
			The proposed landscaping complies with the State's Model Water Efficient Landscape Ordinance and the California Green Building Standards Code (CalGreen).
			Scale and nature of landscape materials is appropriate to site and structure (<i>Plants are of type, spacing, and sizing to reach maturity within reasonable time. Hardy, drought tolerant, low maintenance species adapted to Winters climate are emphasized, parking lot trees also withstand heat, pollutants).</i>
			Signs
			Signs are compatible with architectural character of buildings (<i>signage does not dominate site, uses compatible colors and material, lighting is restrained and harmonious</i>)
			Lighting
			Lighting harmonizes with site, building design, architecture, and landscaping (<i>lighting form, function, character, fixture styles, design and placement; lighting does not interfere with pedestrian movement</i>).
			The proposed development includes consideration to the effects of light pollution on the environment, as well as utilization of energy conservation technologies.
			Energy Conservation
			Active and passive solar and other renewable energy design and devices are used (<i>building orientation, landscaping, lighting, heating and cooling, photovoltaic system-ready or installed</i>).
			Devices are unobtrusive and complement design (<i>solar panels flush with roof</i>).
			Green Building (incorporating green building elements)
			Water efficiency
			Energy
			Materials and Resources
			Indoor environmental quality

APPENDIX D

Model Water Efficient Landscape Ordinance

Model Water Efficient Landscape Ordinance

California Code of Regulations
Title 23. Waters
Division 2. Department of Water Resources
Chapter 2.7. Model Water Efficient Landscape Ordinance

§ 490. Purpose.

(a) The State Legislature has found:

- (1) that the waters of the state are of limited supply and are subject to ever increasing demands;
- (2) that the continuation of California's economic prosperity is dependent on the availability of adequate supplies of water for future uses;
- (3) that it is the policy of the State to promote the conservation and efficient use of water and to prevent the waste of this valuable resource;
- (4) that landscapes are essential to the quality of life in California by providing areas for active and passive recreation and as an enhancement to the environment by cleaning air and water, preventing erosion, offering fire protection, and replacing ecosystems lost to development; and
- (5) that landscape design, installation, maintenance and management can and should be water efficient; and
- (6) that Section 2 of Article X of the California Constitution specifies that the right to use water is limited to the amount reasonably required for the beneficial use to be served and the right does not and shall not extend to waste or unreasonable method of use.

(b) Consistent with these legislative findings, the purpose of this model ordinance is to:

- (1) promote the values and benefits of landscapes while recognizing the need to invest water and other resources as efficiently as possible;
- (2) establish a structure for planning, designing, installing, maintaining and managing water efficient landscapes in new construction and rehabilitated projects;
- (3) establish provisions for water management practices and water waste prevention for existing landscapes;
- (4) use water efficiently without waste by setting a Maximum Applied Water Allowance as an upper limit for water use and reduce water use to the lowest practical amount;
- (5) promote the benefits of consistent landscape ordinances with neighboring local and regional agencies;
- (6) encourage local agencies and water purveyors to use economic incentives that promote the efficient use of water, such as implementing a tiered-rate structure; and
- (7) encourage local agencies to designate the necessary authority that implements and enforces the provisions of the Model Water Efficient Landscape Ordinance or its local landscape ordinance.

Note: Authority cited: Section 65593, Government Code. Reference: Sections 65591, 65593, 65596, Government Code.

§ 490.1 Applicability

- (a) After January 1, 2010, this ordinance shall apply to all of the following landscape projects:
- (1) new construction and rehabilitated landscapes for public agency projects and private development projects with a landscape area equal to or greater than 2,500 square feet requiring a building or landscape permit, plan check or design review;
 - (2) new construction and rehabilitated landscapes which are developer-installed in single-family and multi-family projects with a landscape area equal to or greater than 2,500 square feet requiring a building or landscape permit, plan check, or design review;
 - (3) new construction landscapes which are homeowner-provided and/or homeowner-hired in single-family and multi-family residential projects with a total project landscape area equal to or greater than 5,000 square feet requiring a building or landscape permit, plan check or design review;

(4) existing landscapes limited to Sections 493, 493.1 and 493.2; and
(5) cemeteries. Recognizing the special landscape management needs of cemeteries, new and rehabilitated cemeteries are limited to Sections 492.4, 492.11 and 492.12; and existing cemeteries are limited to Sections 493, 493.1 and 493.2.

(b) This ordinance does not apply to:

- (1) registered local, state or federal historical sites;
- (2) ecological restoration projects that do not require a permanent irrigation system;
- (3) mined-land reclamation projects that do not require a permanent irrigation system; or
- (4) plant collections, as part of botanical gardens and arboretums open to the public.

Note: Authority Cited: Section 65595, Government Code. Reference: Section 65596, Government Code.

§ 491. Definitions.

The terms used in this ordinance have the meaning set forth below:

- (a) “applied water” means the portion of water supplied by the irrigation system to the landscape.
- (b) “automatic irrigation controller” means an automatic timing device used to remotely control valves that operate an irrigation system. Automatic irrigation controllers schedule irrigation events using either evapotranspiration (weather-based) or soil moisture data.
- (c) “backflow prevention device” means a safety device used to prevent pollution or contamination of the water supply due to the reverse flow of water from the irrigation system.
- (d) “Certificate of Completion” means the document required under Section 492.9.
- (e) “certified irrigation designer” means a person certified to design irrigation systems by an accredited academic institution a professional trade organization or other program such as the US Environmental Protection Agency’s WaterSense irrigation designer certification program and Irrigation Association’s Certified Irrigation Designer program.
- (f) “certified landscape irrigation auditor” means a person certified to perform landscape irrigation audits by an accredited academic institution, a professional trade organization or other program such as the US Environmental Protection Agency’s WaterSense irrigation auditor certification program and Irrigation Association’s Certified Landscape Irrigation Auditor program.
- (g) “check valve” or “anti-drain valve” means a valve located under a sprinkler head, or other location in the irrigation system, to hold water in the system to prevent drainage from sprinkler heads when the sprinkler is off.
- (h) “common interest developments” means community apartment projects, condominium projects, planned developments, and stock cooperatives per Civil Code Section 1351.
- (i) “conversion factor (0.62)” means the number that converts acre-inches per acre per year to gallons per square foot per year
- (j) “drip irrigation” means any non-spray low volume irrigation system utilizing emission devices with a flow rate measured in gallons per hour. Low volume irrigation systems are specifically designed to apply small volumes of water slowly at or near the root zone of plants.
- (k) “ecological restoration project” means a project where the site is intentionally altered to establish a defined, indigenous, historic ecosystem.
- (l) “effective precipitation” or “usable rainfall” (Eppt) means the portion of total precipitation which becomes available for plant growth.
- (m) “emitter” means a drip irrigation emission device that delivers water slowly from the system to the soil.
- (n) “established landscape” means the point at which plants in the landscape have developed significant root growth into the soil. Typically, most plants are established after one or two years of growth.
- (o) “establishment period of the plants” means the first year after installing the plant in the landscape or the first two years if irrigation will be terminated after establishment. Typically, most plants are established after one or two years of growth.

(p) “Estimated Total Water Use” (ETWU) means the total water used for the landscape as described in Section 492.4.

(q) “ET adjustment factor” (ETAF) means a factor of 0.7, that, when applied to reference evapotranspiration, adjusts for plant factors and irrigation efficiency, two major influences upon the amount of water that needs to be applied to the landscape.

A combined plant mix with a site-wide average of 0.5 is the basis of the plant factor portion of this calculation. For purposes of the ETAF, the average irrigation efficiency is 0.71. Therefore, the ET Adjustment Factor is $(0.7) \div (0.5/0.71)$. ETAF for a Special Landscape Area shall not exceed 1.0. ETAF for existing non-rehabilitated landscapes is 0.8.

(r) “evapotranspiration rate” means the quantity of water evaporated from adjacent soil and other surfaces and transpired by plants during a specified time.

(s) “flow rate” means the rate at which water flows through pipes, valves and emission devices, measured in gallons per minute, gallons per hour, or cubic feet per second.

(t) “hardscapes” means any durable material (pervious and non-pervious).

(u) “homeowner-provided landscaping” means any landscaping either installed by a private individual for a single family residence or installed by a licensed contractor hired by a homeowner. A homeowner, for purposes of this ordinance, is a person who occupies the dwelling he or she owns. This excludes speculative homes, which are not owner-occupied dwellings.

(v) “hydrozone” means a portion of the landscaped area having plants with similar water needs. A hydrozone may be irrigated or non-irrigated.

(w) “infiltration rate” means the rate of water entry into the soil expressed as a depth of water per unit of time (e.g., inches per hour).

(x) “invasive plant species” means species of plants not historically found in California that spread outside cultivated areas and can damage environmental or economic resources. Invasive species may be regulated by county agricultural agencies as noxious species. “Noxious weeds” means any weed designated by the Weed Control Regulations in the Weed Control Act and identified on a Regional District noxious weed control list. Lists of invasive plants are maintained at the California Invasive Plant Inventory and USDA invasive and noxious weeds database.

(y) “irrigation audit” means an in-depth evaluation of the performance of an irrigation system conducted by a Certified Landscape Irrigation Auditor. An irrigation audit includes, but is not limited to: inspection, system tune-up, system test with distribution uniformity or emission uniformity, reporting overspray or runoff that causes overland flow, and preparation of an irrigation schedule.

(z) “irrigation efficiency” (IE) means the measurement of the amount of water beneficially used divided by the amount of water applied. Irrigation efficiency is derived from measurements and estimates of irrigation system characteristics and management practices. The minimum average irrigation efficiency for purposes of this ordinance is 0.71. Greater irrigation efficiency can be expected from well designed and maintained systems.

(aa) “irrigation survey” means an evaluation of an irrigation system that is less detailed than an irrigation audit. An irrigation survey includes, but is not limited to: inspection, system test, and written recommendations to improve performance of the irrigation system.

(bb) “irrigation water use analysis” means an analysis of water use data based on meter readings and billing data.

(cc) “landscape architect” means a person who holds a license to practice landscape architecture in the state of California Business and Professions Code, Section 5615.

(dd) “landscape area” means all the planting areas, turf areas, and water features in a landscape design plan subject to the Maximum Applied Water Allowance calculation. The landscape area does not include footprints of buildings or structures, sidewalks, driveways, parking lots, decks, patios, gravel or stone walks, other pervious or non-pervious hardscapes, and other non-irrigated areas designated for non-development (e.g., open spaces and existing native vegetation).

- (ee) “landscape contractor” means a person licensed by the state of California to construct, maintain, repair, install, or subcontract the development of landscape systems.
- (ff) “Landscape Documentation Package” means the documents required under Section 492.3.
- (gg) “landscape project” means total area of landscape in a project as defined in “landscape area” for the purposes of this ordinance, meeting requirements under Section 490.1.
- (hh) “lateral line” means the water delivery pipeline that supplies water to the emitters or sprinklers from the valve.
- (ii) “local agency” means a city or county, including a charter city or charter county, that is responsible for adopting and implementing the ordinance. The local agency is also responsible for the enforcement of this ordinance, including but not limited to, approval of a permit and plan check or design review of a project.
- (jj) “local water purveyor” means any entity, including a public agency, city, county, or private water company that provides retail water service.
- (kk) “low volume irrigation” means the application of irrigation water at low pressure through a system of tubing or lateral lines and low-volume emitters such as drip, drip lines, and bubblers. Low volume irrigation systems are specifically designed to apply small volumes of water slowly at or near the root zone of plants.
- (ll) “main line” means the pressurized pipeline that delivers water from the water source to the valve or outlet.
- (mm) “Maximum Applied Water Allowance” (MAWA) means the upper limit of annual applied water for the established landscaped area as specified in Section 492.4. It is based upon the area’s reference evapotranspiration, the ET Adjustment Factor, and the size of the landscape area. The Estimated Total Water Use shall not exceed the Maximum Applied Water Allowance. Special Landscape Areas, including recreation areas, areas permanently and solely dedicated to edible plants such as orchards and vegetable gardens, and areas irrigated with recycled water are subject to the MAWA with an ETAF not to exceed 1.0.
- (nn) “microclimate” means the climate of a small, specific area that may contrast with the climate of the overall landscape area due to factors such as wind, sun exposure, plant density, or proximity to reflective surfaces.
- (oo) “mined-land reclamation projects” means any surface mining operation with a reclamation plan approved in accordance with the Surface Mining and Reclamation Act of 1975.
- (pp) “mulch” means any organic material such as leaves, bark, straw, compost, or inorganic mineral materials such as rocks, gravel, and decomposed granite left loose and applied to the soil surface for the beneficial purposes of reducing evaporation, suppressing weeds, moderating soil temperature, and preventing soil erosion.
- (qq) “new construction” means, for the purposes of this ordinance, a new building with a landscape or other new landscape, such as a park, playground, or greenbelt without an associated building.
- (rr) “operating pressure” means the pressure at which the parts of an irrigation system are designed by the manufacturer to operate.
- (ss) “overhead sprinkler irrigation systems” means systems that deliver water through the air (e.g., spray heads and rotors).
- (tt) “overspray” means the irrigation water which is delivered beyond the target area.
- (uu) “permit” means an authorizing document issued by local agencies for new construction or rehabilitated landscapes.
- (vv) “pervious” means any surface or material that allows the passage of water through the material and into the underlying soil.
- (ww) “plant factor” or “plant water use factor” is a factor , when multiplied by ETo, estimates the amount of water needed by plants. For purposes of this ordinance, the plant factor range for low water use plants is 0 to 0.3, the plant factor range for moderate water use plants is 0.4 to 0.6, and the plant

factor range for high water use plants is 0.7 to 1.0. Plant factors cited in this ordinance are derived from the Department of Water Resources 2000 publication "Water Use Classification of Landscape Species".

(xx) "precipitation rate" means the rate of application of water measured in inches per hour.

(yy) "project applicant" means the individual or entity submitting a Landscape Documentation Package required under Section 492.3, to request a permit, plan check, or design review from the local agency. A project applicant may be the property owner or his or her designee.

(zz) "rain sensor" or "rain sensing shutoff device" means a component which automatically suspends an irrigation event when it rains.

(aaa) "record drawing" or "as-builts" means a set of reproducible drawings which show significant changes in the work made during construction and which are usually based on drawings marked up in the field and other data furnished by the contractor.

(bbb) "recreational area" means areas dedicated to active play such as parks, sports fields, and golf courses where turf provides a playing surface.

(ccc) "recycled water", "reclaimed water", or "treated sewage effluent water" means treated or recycled waste water of a quality suitable for non-potable uses such as landscape irrigation and water features. This water is not intended for human consumption.

(ddd) "reference evapotranspiration" or "ET_o" means a standard measurement of environmental parameters which affect the water use of plants. ET_o is expressed in inches per day, month, or year as represented in Section 495.1, and is an estimate of the evapotranspiration of a large field of four- to seven-inch tall, cool-season grass that is well watered. Reference evapotranspiration is used as the basis of determining the Maximum Applied Water Allowance so that regional differences in climate can be accommodated.

(eee) "rehabilitated landscape" means any re-landscaping project that requires a permit, plan check, or design review, meets the requirements of Section 490.1, and the modified landscape area is equal to or greater than 2,500 square feet, is 50% of the total landscape area, and the modifications are completed within one year.

(fff) "runoff" means water which is not absorbed by the soil or landscape to which it is applied and flows from the landscape area. For example, runoff may result from water that is applied at too great a rate (application rate exceeds infiltration rate) or when there is a slope.

(ggg) "soil moisture sensing device" or "soil moisture sensor" means a device that measures the amount of water in the soil. The device may also suspend or initiate an irrigation event.

(hhh) "soil texture" means the classification of soil based on its percentage of sand, silt, and clay.

(iii) "Special Landscape Area" (SLA) means an area of the landscape dedicated solely to edible plants, areas irrigated with recycled water, water features using recycled water and areas dedicated to active play such as parks, sports fields, golf courses, and where turf provides a playing surface.

(jjj) "sprinkler head" means a device which delivers water through a nozzle.

(kkk) "static water pressure" means the pipeline or municipal water supply pressure when water is not flowing.

(lll) "station" means an area served by one valve or by a set of valves that operate simultaneously.

(mmm) "swing joint" means an irrigation component that provides a flexible, leak-free connection between the emission device and lateral pipeline to allow movement in any direction and to prevent equipment damage.

(nnn) "turf" means a ground cover surface of mowed grass. Annual bluegrass, Kentucky bluegrass, Perennial ryegrass, Red fescue, and Tall fescue are cool-season grasses. Bermudagrass, Kikuyugrass, Seashore Paspalum, St. Augustinegrass, Zoysiagrass, and Buffalo grass are warm-season grasses.

(ooo) "valve" means a device used to control the flow of water in the irrigation system.

(ppp) "water conserving plant species" means a plant species identified as having a low plant factor.

(qqq) "water feature" means a design element where open water performs an aesthetic or recreational function. Water features include ponds, lakes, waterfalls, fountains, artificial streams, spas, and swimming pools (where water is artificially supplied). The surface area of water features is included in

the high water use hydrozone of the landscape area. Constructed wetlands used for on-site wastewater treatment or stormwater best management practices that are not irrigated and used solely for water treatment or stormwater retention are not water features and, therefore, are not subject to the water budget calculation.

(rrr) “watering window” means the time of day irrigation is allowed.

(sss) “WUCOLS” means the Water Use Classification of Landscape Species published by the University of California Cooperative Extension, the Department of Water Resources and the Bureau of Reclamation, 2000.

Note: Authority Cited: Section 65595, Government Code. Reference: Sections 65592, 65596, Government Code.

§ 492. Provisions for New Construction or Rehabilitated Landscapes.

(a) A local agency may designate another agency, such as a water purveyor, to implement some or all of the requirements contained in this ordinance. Local agencies may collaborate with water purveyors to define each entity’s specific responsibilities relating to this ordinance.

Note: Authority Cited: Section 65595, Government Code. Reference: Section 65596, Government Code.

§ 492.1 Compliance with Landscape Documentation Package.

(a) Prior to construction, the local agency shall:

- (1) provide the project applicant with the ordinance and procedures for permits, plan checks, or design reviews;
- (2) review the Landscape Documentation Package submitted by the project applicant;
- (3) approve or deny the Landscape Documentation Package;
- (4) issue a permit or approve the plan check or design review for the project applicant; and
- (5) upon approval of the Landscape Documentation Package, submit a copy of the Water Efficient Landscape Worksheet to the local water purveyor.

(b) Prior to construction, the project applicant shall:

- (1) submit a Landscape Documentation Package to the local agency.
- (c) Upon approval of the Landscape Documentation Package by the local agency, the project applicant shall:
 - (1) receive a permit or approval of the plan check or design review and record the date of the permit in the Certificate of Completion;
 - (2) submit a copy of the approved Landscape Documentation Package along with the record drawings, and any other information to the property owner or his/her designee; and
 - (3) submit a copy of the Water Efficient Landscape Worksheet to the local water purveyor.

Note: Authority Cited: Section 65595, Government Code. Reference: Section 65596, Government Code.

§ 492.2 Penalties.

(a) A local agency may establish and administer penalties to the project applicant for non-compliance with the ordinance to the extent permitted by law.

Note: Authority Cited: Section 65595, Government Code. Reference: Section 65596, Government Code.

§ 492.3 Elements of the Landscape Documentation Package.

(a) The Landscape Documentation Package shall include the following six (6) elements:

- (1) project information;
 - (A) date
 - (B) project applicant
 - (C) project address (if available, parcel and/or lot number(s))
 - (D) total landscape area (square feet)
 - (E) project type (e.g., new, rehabilitated, public, private, cemetery, homeowner-installed)
 - (F) water supply type (e.g., potable, recycled, well) and identify the local retail water purveyor if the applicant is not served by a private well
 - (G) checklist of all documents in Landscape Documentation Package
 - (H) project contacts to include contact information for the project applicant and property owner
 - (I) applicant signature and date with statement, "I agree to comply with the requirements of the water efficient landscape ordinance and submit a complete Landscape Documentation Package".
- (2) Water Efficient Landscape Worksheet;
 - (A) hydrozone information table
 - (B) water budget calculations
 1. Maximum Applied Water Allowance (MAWA)
 2. Estimated Total Water Use (ETWU)
 - (3) soil management report;
 - (4) landscape design plan;
 - (5) irrigation design plan; and
 - (6) grading design plan.

Note: Authority Cited: Section 65595, Government Code. Reference: Section 65596, Government Code.

§ 492.4 Water Efficient Landscape Worksheet.

(a) A project applicant shall complete the Water Efficient Landscape Worksheet which contains two sections (see sample worksheet in Appendix B):

- (1) a hydrozone information table (see Appendix B, Section A) for the landscape project; and
- (2) a water budget calculation (see Appendix B, Section B) for the landscape project. For the calculation of the Maximum Applied Water Allowance and Estimated Total Water Use, a project applicant shall use the ETo values from the Reference Evapotranspiration Table in Appendix A. For geographic areas not covered in Appendix A, use data from other cities located nearby in the same reference evapotranspiration zone, as found in the CIMIS Reference Evapotranspiration Zones Map, Department of Water Resources, 1999.

(b) Water budget calculations shall adhere to the following requirements:

- (1) The plant factor used shall be from WUCOLS. The plant factor ranges from 0 to 0.3 for low water use plants, from 0.4 to 0.6 for moderate water use plants, and from 0.7 to 1.0 for high water use plants.
- (2) All water features shall be included in the high water use hydrozone and temporarily irrigated areas shall be included in the low water use hydrozone.
- (3) All Special Landscape Areas shall be identified and their water use calculated as described below.
- (4) ETAF for Special Landscape Areas shall not exceed 1.0.

(c) Maximum Applied Water Allowance

The Maximum Applied Water Allowance shall be calculated using the equation:

$$\text{MAWA} = (\text{ETo}) (0.62) [(0.7 \times \text{LA}) + (0.3 \times \text{SLA})]$$

The example calculations below are hypothetical to demonstrate proper use of the equations and do not represent an existing and/or planned landscape project. The ETo values used in these calculations are from the Reference Evapotranspiration Table in Appendix A, for planning purposes only. For actual irrigation scheduling, automatic irrigation controllers are required and shall use current reference evapotranspiration data, such as from the California Irrigation Management Information System (CIMIS), other equivalent data, or soil moisture sensor data.

(1) Example MAWA calculation: a hypothetical landscape project in Fresno, CA with an irrigated landscape area of 50,000 square feet without any Special Landscape Area (SLA= 0, no edible plants, recreational areas, or use of recycled water). To calculate MAWA, the annual reference evapotranspiration value for Fresno is 51.1 inches as listed in the Reference Evapotranspiration Table in Appendix A.

$$MAWA = (ET_o) (0.62) [(0.7 \times LA) + (0.3 \times SLA)]$$

MAWA = Maximum Applied Water Allowance (gallons per year)

ET_o = Reference Evapotranspiration (inches per year)

0.62 = Conversion Factor (to gallons)

0.7 = ET Adjustment Factor (ETAF)

LA = Landscape Area including SLA (square feet)

0.3 = Additional Water Allowance for SLA

SLA = Special Landscape Area (square feet)

$$MAWA = (51.1 \text{ inches}) (0.62) [(0.7 \times 50,000 \text{ square feet}) + (0.3 \times 0)]$$

$$= 1,108,870 \text{ gallons per year}$$

To convert from gallons per year to hundred-cubic-feet per year:

$$= 1,108,870 / 748 = 1,482 \text{ hundred-cubic-feet per year}$$

(100 cubic feet = 748 gallons)

(2) In this next hypothetical example, the landscape project in Fresno, CA has the same ETo value of 51.1 inches and a total landscape area of 50,000 square feet. Within the 50,000 square foot project, there is now a 2,000 square foot area planted with edible plants. This 2,000 square foot area is considered to be a Special Landscape Area.

$$MAWA = (ET_o) (0.62) [(0.7 \times LA) + (0.3 \times SLA)]$$

$$MAWA = (51.1 \text{ inches}) (0.62) [(0.7 \times 50,000 \text{ square feet}) + (0.3 \times 2,000 \text{ square feet})]$$

$$= 31.68 \times [35,000 + 600] \text{ gallons per year}$$

$$= 31.68 \times 35,600 \text{ gallons per year}$$

$$= 1,127,808 \text{ gallons per year or } 1,508 \text{ hundred-cubic-feet per year}$$

(d) Estimated Total Water Use.

The Estimated Total Water Use shall be calculated using the equation below. The sum of the Estimated Total Water Use calculated for all hydrozones shall not exceed MAWA.

$$ETWU = (ET_o)(0.62) \left(\frac{PF \times HA}{IE} + SLA \right)$$

Where:

ETWU = Estimated Total Water Use per year (gallons)

ET_o = Reference Evapotranspiration (inches)

PF = Plant Factor from WUCOLS (see Section 491)

HA = Hydrozone Area [high, medium, and low water use areas] (square feet)

SLA = Special Landscape Area (square feet)

0.62 = Conversion Factor

IE = Irrigation Efficiency (minimum 0.71)

(1) Example ETWU calculation: landscape area is 50,000 square feet; plant water use type, plant factor, and hydrozone area are shown in the table below. The ETo value is 51.1 inches per year. There are no Special Landscape Areas (recreational area, area permanently and solely dedicated to edible plants, and area irrigated with recycled water) in this example.

Hydrozone	Plant Water Use Type(s)	Plant Factor (PF)*	Hydrozone Area (HA) (square feet)	PF x HA (square feet)
1	High	0.8	7,000	5,600
2	High	0.7	10,000	7,000
3	Medium	0.5	16,000	8,000
4	Low	0.3	7,000	2,100
5	Low	0.2	10,000	2,000
			Sum	24,700

*Plant Factor from WUCOLS

$$ETWU = (51.1)(0.62) \left(\frac{24,700}{0.71} + 0 \right)$$

= 1,102,116 gallons per year

Compare ETWU with MAWA: For this example MAWA = (51.1) (0.62) [(0.7 x 50,000) + (0.3 x 0)] = 1,108,870 gallons per year. The ETWU (1,102,116 gallons per year) is less than MAWA (1,108,870 gallons per year). In this example, the water budget complies with the MAWA.

(2) Example ETWU calculation: total landscape area is 50,000 square feet, 2,000 square feet of which is planted with edible plants. The edible plant area is considered a Special Landscape Area (SLA). The reference evapotranspiration value is 51.1 inches per year. The plant type, plant factor, and hydrozone area are shown in the table below.

Hydrozone	Plant Water Use Type(s)	Plant Factor (PF)*	Hydrozone Area (HA) (square feet)	PF x HA (square feet)
1	High	0.8	7,000	5,600
2	High	0.7	9,000	6,300
3	Medium	0.5	15,000	7,500
4	Low	0.3	7,000	2,100
5	Low	0.2	10,000	2,000
			Sum	23,500
6	SLA	1.0	2,000	2,000

*Plant Factor from WUCOLS

$$ETWU = (51.1)(0.62) \left(\frac{23,500}{0.71} + 2,000 \right)$$

= (31.68) (33,099 + 2,000)

= 1,111,936 gallons per year

Compare ETWU with MAWA. For this example:
MAWA = (51.1) (0.62) [(0.7 x 50,000) + (0.3 x 2,000)]
= 31.68 x [35,000 + 600]
= 31.68 x 35,600
=1,127,808 gallons per year

The ETWU (1,111,936 gallons per year) is less than MAWA (1,127,808 gallons per year). For this example, the water budget complies with the MAWA.

Note: Authority Cited: Section 65595, Government Code. Reference: Section 65596, Government Code.

§ 492.5 Soil Management Report.

(a) In order to reduce runoff and encourage healthy plant growth, a soil management report shall be completed by the project applicant, or his/her designee, as follows:

(1) Submit soil samples to a laboratory for analysis and recommendations.

(A) Soil sampling shall be conducted in accordance with laboratory protocol, including protocols regarding adequate sampling depth for the intended plants.

(B) The soil analysis may include:

1. soil texture;
2. infiltration rate determined by laboratory test or soil texture infiltration rate table;
3. pH;
4. total soluble salts;
5. sodium;
6. percent organic matter; and
7. recommendations.

(2) The project applicant, or his/her designee, shall comply with one of the following:

(A) If significant mass grading is not planned, the soil analysis report shall be submitted to the local agency as part of the Landscape Documentation Package; or

(B) If significant mass grading is planned, the soil analysis report shall be submitted to the local agency as part of the Certificate of Completion.

(3) The soil analysis report shall be made available, in a timely manner, to the professionals preparing the landscape design plans and irrigation design plans to make any necessary adjustments to the design plans.

(4) The project applicant, or his/her designee, shall submit documentation verifying implementation of soil analysis report recommendations to the local agency with Certificate of Completion.

Note: Authority Cited: Section 65595, Government Code. Reference: Section 65596, Government Code.

§ 492.6 Landscape Design Plan.

(a) For the efficient use of water, a landscape shall be carefully designed and planned for the intended function of the project. A landscape design plan meeting the following design criteria shall be submitted as part of the Landscape Documentation Package.

(1) Plant Material

(A) Any plant may be selected for the landscape, providing the Estimated Total Water Use in the landscape area does not exceed the Maximum Applied Water Allowance. To encourage the efficient use of water, the following is highly recommended:

1. protection and preservation of native species and natural vegetation;
2. selection of water-conserving plant and turf species;

3. selection of plants based on disease and pest resistance;
 4. selection of trees based on applicable local tree ordinances or tree shading guidelines; and
 5. selection of plants from local and regional landscape program plant lists.
- (B) Each hydrozone shall have plant materials with similar water use, with the exception of hydrozones with plants of mixed water use, as specified in Section 492.7(a)(2)(D).
- (C) Plants shall be selected and planted appropriately based upon their adaptability to the climatic, geologic, and topographical conditions of the project site. To encourage the efficient use of water, the following is highly recommended:
1. use the Sunset Western Climate Zone System which takes into account temperature, humidity, elevation, terrain, latitude, and varying degrees of continental and marine influence on local climate;
 2. recognize the horticultural attributes of plants (i.e., mature plant size, invasive surface roots) to minimize damage to property or infrastructure [e.g., buildings, sidewalks, power lines]; and
 3. consider the solar orientation for plant placement to maximize summer shade and winter solar gain.
- (D) Turf is not allowed on slopes greater than 25% where the toe of the slope is adjacent to an impermeable hardscape and where 25% means 1 foot of vertical elevation change for every 4 feet of horizontal length (rise divided by run x 100 = slope percent).
- (E) A landscape design plan for projects in fire-prone areas shall address fire safety and prevention. A defensible space or zone around a building or structure is required per Public Resources Code Section 4291(a) and (b). Avoid fire-prone plant materials and highly flammable mulches.
- (F) The use of invasive and/or noxious plant species is strongly discouraged.
- (G) The architectural guidelines of a common interest development, which include community apartment projects, condominiums, planned developments, and stock cooperatives, shall not prohibit or include conditions that have the effect of prohibiting the use of low-water use plants as a group.
- (2) Water Features
- (A) Recirculating water systems shall be used for water features.
 - (B) Where available, recycled water shall be used as a source for decorative water features.
 - (C) Surface area of a water feature shall be included in the high water use hydrozone area of the water budget calculation.
 - (D) Pool and spa covers are highly recommended.
- (3) Mulch and Amendments
- (A) A minimum two inch (2") layer of mulch shall be applied on all exposed soil surfaces of planting areas except in turf areas, creeping or rooting groundcovers, or direct seeding applications where mulch is contraindicated.
 - (B) Stabilizing mulching products shall be used on slopes.
 - (C) The mulching portion of the seed/mulch slurry in hydro-seeded applications shall meet the mulching requirement.
 - (D) Soil amendments shall be incorporated according to recommendations of the soil report and what is appropriate for the plants selected (see Section 492.5).
- (b) The landscape design plan, at a minimum, shall:
- (1) delineate and label each hydrozone by number, letter, or other method;
 - (2) identify each hydrozone as low, moderate, high water, or mixed water use. Temporarily irrigated areas of the landscape shall be included in the low water use hydrozone for the water budget calculation;
 - (3) identify recreational areas;
 - (4) identify areas permanently and solely dedicated to edible plants;
 - (5) identify areas irrigated with recycled water;
 - (6) identify type of mulch and application depth;
 - (7) identify soil amendments, type, and quantity;
 - (8) identify type and surface area of water features;
 - (9) identify hardscapes (pervious and non-pervious);

- (10) identify location and installation details of any applicable stormwater best management practices that encourage on-site retention and infiltration of stormwater. Stormwater best management practices are encouraged in the landscape design plan and examples include, but are not limited to:
- (A) infiltration beds, swales, and basins that allow water to collect and soak into the ground;
 - (B) constructed wetlands and retention ponds that retain water, handle excess flow, and filter pollutants; and
 - (C) pervious or porous surfaces (e.g., permeable pavers or blocks, pervious or porous concrete, etc.) that minimize runoff.
- (11) identify any applicable rain harvesting or catchment technologies (e.g., rain gardens, cisterns, etc.);
- (12) contain the following statement: “I have complied with the criteria of the ordinance and applied them for the efficient use of water in the landscape design plan”; and
- (13) bear the signature of a licensed landscape architect, licensed landscape contractor, or any other person authorized to design a landscape. (See Sections 5500.1, 5615, 5641, 5641.1, 5641.2, 5641.3, 5641.4, 5641.5, 5641.6, 6701, 7027.5 of the Business and Professions Code, Section 832.27 of Title 16 of the California Code of Regulations, and Section 6721 of the Food and Agriculture Code.)

Note: Authority Cited: Section 65595, Government Code. Reference: Section 65596, Government Code and Section 1351, Civil Code.

§ 492.7 Irrigation Design Plan.

(a) For the efficient use of water, an irrigation system shall meet all the requirements listed in this section and the manufacturers’ recommendations. The irrigation system and its related components shall be planned and designed to allow for proper installation, management, and maintenance. An irrigation design plan meeting the following design criteria shall be submitted as part of the Landscape Documentation Package.

(1) System

(A) Dedicated landscape water meters are highly recommended on landscape areas smaller than 5,000 square feet to facilitate water management.

(B) Automatic irrigation controllers utilizing either evapotranspiration or soil moisture sensor data shall be required for irrigation scheduling in all irrigation systems.

(C) The irrigation system shall be designed to ensure that the dynamic pressure at each emission device is within the manufacturer’s recommended pressure range for optimal performance.

1. If the static pressure is above or below the required dynamic pressure of the irrigation system, pressure-regulating devices such as inline pressure regulators, booster pumps, or other devices shall be installed to meet the required dynamic pressure of the irrigation system.

2. Static water pressure, dynamic or operating pressure, and flow reading of the water supply shall be measured at the point of connection. These pressure and flow measurements shall be conducted at the design stage. If the measurements are not available at the design stage, the measurements shall be conducted at installation.

(D) Sensors (rain, freeze, wind, etc.), either integral or auxiliary, that suspend or alter irrigation operation during unfavorable weather conditions shall be required on all irrigation systems, as appropriate for local climatic conditions. Irrigation should be avoided during windy or freezing weather or during rain.

(E) Manual shut-off valves (such as a gate valve, ball valve, or butterfly valve) shall be required, as close as possible to the point of connection of the water supply, to minimize water loss in case of an emergency (such as a main line break) or routine repair.

(F) Backflow prevention devices shall be required to protect the water supply from contamination by the irrigation system. A project applicant shall refer to the applicable local agency code (i.e., public health) for additional backflow prevention requirements.

(G) High flow sensors that detect and report high flow conditions created by system damage or malfunction are recommended.

(H) The irrigation system shall be designed to prevent runoff, low head drainage, overspray, or other similar conditions where irrigation water flows onto non-targeted areas, such as adjacent property, non-irrigated areas, hardscapes, roadways, or structures.

(I) Relevant information from the soil management plan, such as soil type and infiltration rate, shall be utilized when designing irrigation systems.

(J) The design of the irrigation system shall conform to the hydrozones of the landscape design plan.

(K) The irrigation system must be designed and installed to meet, at a minimum, the irrigation efficiency criteria as described in Section 492.4 regarding the Maximum Applied Water Allowance.

(L) It is highly recommended that the project applicant or local agency inquire with the local water purveyor about peak water operating demands (on the water supply system) or water restrictions that may impact the effectiveness of the irrigation system.

(M) In mulched planting areas, the use of low volume irrigation is required to maximize water infiltration into the root zone.

(N) Sprinkler heads and other emission devices shall have matched precipitation rates, unless otherwise directed by the manufacturer's recommendations.

(O) Head to head coverage is recommended. However, sprinkler spacing shall be designed to achieve the highest possible distribution uniformity using the manufacturer's recommendations.

(P) Swing joints or other riser-protection components are required on all risers subject to damage that are adjacent to high traffic areas.

(Q) Check valves or anti-drain valves are required for all irrigation systems.

(R) Narrow or irregularly shaped areas, including turf, less than eight (8) feet in width in any direction shall be irrigated with subsurface irrigation or low volume irrigation system.

(S) Overhead irrigation shall not be permitted within 24 inches of any non-permeable surface. Allowable irrigation within the setback from non-permeable surfaces may include drip, drip line, or other low flow non-spray technology. The setback area may be planted or unplanted. The surfacing of the setback may be mulch, gravel, or other porous material. These restrictions may be modified if:

1. the landscape area is adjacent to permeable surfacing and no runoff occurs; or
2. the adjacent non-permeable surfaces are designed and constructed to drain entirely to landscaping; or
3. the irrigation designer specifies an alternative design or technology, as part of the Landscape Documentation Package and clearly demonstrates strict adherence to irrigation system design criteria in Section 492.7 (a)(1)(H). Prevention of overspray and runoff must be confirmed during the irrigation audit.

(T) Slopes greater than 25% shall not be irrigated with an irrigation system with a precipitation rate exceeding 0.75 inches per hour. This restriction may be modified if the landscape designer specifies an alternative design or technology, as part of the Landscape Documentation Package, and clearly demonstrates no runoff or erosion will occur. Prevention of runoff and erosion must be confirmed during the irrigation audit.

(2) Hydrozone

(A) Each valve shall irrigate a hydrozone with similar site, slope, sun exposure, soil conditions, and plant materials with similar water use.

(B) Sprinkler heads and other emission devices shall be selected based on what is appropriate for the plant type within that hydrozone.

(C) Where feasible, trees shall be placed on separate valves from shrubs, groundcovers, and turf.

(D) Individual hydrozones that mix plants of moderate and low water use, or moderate and high water use, may be allowed if:

1. plant factor calculation is based on the proportions of the respective plant water uses and their plant factor; or

2. the plant factor of the higher water using plant is used for calculations.

(E) Individual hydrozones that mix high and low water use plants shall not be permitted.

(F) On the landscape design plan and irrigation design plan, hydrozone areas shall be designated by number, letter, or other designation. On the irrigation design plan, designate the areas irrigated by each valve, and assign a number to each valve. Use this valve number in the Hydrozone Information Table (see Appendix B Section A). This table can also assist with the irrigation audit and programming the controller.

(b) The irrigation design plan, at a minimum, shall contain:

(1) location and size of separate water meters for landscape;

(2) location, type and size of all components of the irrigation system, including controllers, main and lateral lines, valves, sprinkler heads, moisture sensing devices, rain switches, quick couplers, pressure regulators, and backflow prevention devices;

(3) static water pressure at the point of connection to the public water supply;

(4) flow rate (gallons per minute), application rate (inches per hour), and design operating pressure (pressure per square inch) for each station;

(5) recycled water irrigation systems as specified in Section 492.14;

(6) the following statement: "I have complied with the criteria of the ordinance and applied them accordingly for the efficient use of water in the irrigation design plan"; and

(7) the signature of a licensed landscape architect, certified irrigation designer, licensed landscape contractor, or any other person authorized to design an irrigation system. (See Sections 5500.1, 5615, 5641, 5641.1, 5641.2, 5641.3, 5641.4, 5641.5, 5641.6, 6701, 7027.5 of the Business and Professions Code, Section 832.27 of Title 16 of the California Code of Regulations, and Section 6721 of the Food and Agricultural Code.)

Note: Authority Cited: Section 65595, Government Code. Reference: Section 65596, Government Code.

§ 492.8 Grading Design Plan.

(a) For the efficient use of water, grading of a project site shall be designed to minimize soil erosion, runoff, and water waste. A grading plan shall be submitted as part of the Landscape Documentation Package. A comprehensive grading plan prepared by a civil engineer for other local agency permits satisfies this requirement.

(1) The project applicant shall submit a landscape grading plan that indicates finished configurations and elevations of the landscape area including:

(A) height of graded slopes;

(B) drainage patterns;

(C) pad elevations;

(D) finish grade; and

(E) stormwater retention improvements, if applicable.

(2) To prevent excessive erosion and runoff, it is highly recommended that project applicants:

(A) grade so that all irrigation and normal rainfall remains within property lines and does not drain on to non-permeable hardscapes;

(B) avoid disruption of natural drainage patterns and undisturbed soil; and

(C) avoid soil compaction in landscape areas.

(3) The grading design plan shall contain the following statement: "I have complied with the criteria of the ordinance and applied them accordingly for the efficient use of water in the grading design plan" and shall bear the signature of a licensed professional as authorized by law.

Note: Authority Cited: Section 65595, Government Code. Reference: Section 65596, Government Code.

§ 492.9 Certificate of Completion.

(a) The Certificate of Completion (see Appendix C for a sample certificate) shall include the following six (6) elements:

(1) project information sheet that contains:

(A) date;

(B) project name;

(C) project applicant name, telephone, and mailing address;

(D) project address and location; and

(E) property owner name, telephone, and mailing address;

(2) certification by either the signer of the landscape design plan, the signer of the irrigation design plan, or the licensed landscape contractor that the landscape project has been installed per the approved Landscape Documentation Package;

(A) where there have been significant changes made in the field during construction, these “as-built” or record drawings shall be included with the certification;

(3) irrigation scheduling parameters used to set the controller (see Section 492.10);

(4) landscape and irrigation maintenance schedule (see Section 492.11);

(5) irrigation audit report (see Section 492.12); and

(6) soil analysis report, if not submitted with Landscape Documentation Package, and documentation verifying implementation of soil report recommendations (see Section 492.5).

(b) The project applicant shall:

(1) submit the signed Certificate of Completion to the local agency for review;

(2) ensure that copies of the approved Certificate of Completion are submitted to the local water purveyor and property owner or his or her designee.

(c) The local agency shall:

(1) receive the signed Certificate of Completion from the project applicant;

(2) approve or deny the Certificate of Completion. If the Certificate of Completion is denied, the local agency shall provide information to the project applicant regarding reapplication, appeal, or other assistance.

Note: Authority Cited: Section 65595, Government Code. Reference: Section 65596, Government Code.

§ 492.10 Irrigation Scheduling.

(a) For the efficient use of water, all irrigation schedules shall be developed, managed, and evaluated to utilize the minimum amount of water required to maintain plant health. Irrigation schedules shall meet the following criteria:

(1) Irrigation scheduling shall be regulated by automatic irrigation controllers.

(2) Overhead irrigation shall be scheduled between 8:00 p.m. and 10:00 a.m. unless weather conditions prevent it. If allowable hours of irrigation differ from the local water purveyor, the stricter of the two shall apply. Operation of the irrigation system outside the normal watering window is allowed for auditing and system maintenance.

(3) For implementation of the irrigation schedule, particular attention must be paid to irrigation run times, emission device, flow rate, and current reference evapotranspiration, so that applied water meets the Estimated Total Water Use. Total annual applied water shall be less than or equal to Maximum Applied Water Allowance (MAWA). Actual irrigation schedules shall be regulated by automatic irrigation controllers using current reference evapotranspiration data (e.g., CIMIS) or soil moisture sensor data.

(4) Parameters used to set the automatic controller shall be developed and submitted for each of the following:

(A) the plant establishment period;

- (B) the established landscape; and
- (C) temporarily irrigated areas.
- (5) Each irrigation schedule shall consider for each station all of the following that apply:
 - (A) irrigation interval (days between irrigation);
 - (B) irrigation run times (hours or minutes per irrigation event to avoid runoff);
 - (C) number of cycle starts required for each irrigation event to avoid runoff;
 - (D) amount of applied water scheduled to be applied on a monthly basis;
 - (E) application rate setting;
 - (F) root depth setting;
 - (G) plant type setting;
 - (H) soil type;
 - (I) slope factor setting;
 - (J) shade factor setting; and
 - (K) irrigation uniformity or efficiency setting.

Note: Authority Cited: Section 65595, Government Code. Reference: Section 65596, Government Code.

§ 492.11 Landscape and Irrigation Maintenance Schedule.

- (a) Landscapes shall be maintained to ensure water use efficiency. A regular maintenance schedule shall be submitted with the Certificate of Completion.
- (b) A regular maintenance schedule shall include, but not be limited to, routine inspection; adjustment and repair of the irrigation system and its components; aerating and dethatching turf areas; replenishing mulch; fertilizing; pruning; weeding in all landscape areas, and removing and obstruction to emission devices. Operation of the irrigation system outside the normal watering window is allowed for auditing and system maintenance.
- (c) Repair of all irrigation equipment shall be done with the originally installed components or their equivalents.
- (d) A project applicant is encouraged to implement sustainable or environmentally-friendly practices for overall landscape maintenance.

Note: Authority Cited: Section 65595, Government Code. Reference: Section 65596, Government Code.

§ 492.12 Irrigation Audit, Irrigation Survey, and Irrigation Water Use Analysis.

- (a) All landscape irrigation audits shall be conducted by a certified landscape irrigation auditor.
- (b) For new construction and rehabilitated landscape projects installed after January 1, 2010, as described in Section 490.1:
 - (1) the project applicant shall submit an irrigation audit report with the Certificate of Completion to the local agency that may include, but is not limited to: inspection, system tune-up, system test with distribution uniformity, reporting overspray or run off that causes overland flow, and preparation of an irrigation schedule;
 - (2) the local agency shall administer programs that may include, but not be limited to, irrigation water use analysis, irrigation audits, and irrigation surveys for compliance with the Maximum Applied Water Allowance.

Note: Authority Cited: Section 65595, Government Code. Reference: Section 65596, Government Code.

§ 492.13 Irrigation Efficiency.

(a) For the purpose of determining Maximum Applied Water Allowance, average irrigation efficiency is assumed to be 0.71. Irrigation systems shall be designed, maintained, and managed to meet or exceed an average landscape irrigation efficiency of 0.71.

Note: Authority Cited: Section 65595, Government Code. Reference: Section 65596, Government Code.

§ 492.14 Recycled Water.

(a) The installation of recycled water irrigation systems shall allow for the current and future use of recycled water, unless a written exemption has been granted as described in Section 492.14(b).

(b) Irrigation systems and decorative water features shall use recycled water unless a written exemption has been granted by the local water purveyor stating that recycled water meeting all public health codes and standards is not available and will not be available for the foreseeable future.

(c) All recycled water irrigation systems shall be designed and operated in accordance with all applicable local and State laws.

(d) Landscapes using recycled water are considered Special Landscape Areas. The ET Adjustment Factor for Special Landscape Areas shall not exceed 1.0.

Note: Authority Cited: Section 65595, Government Code. Reference: Section 65596, Government Code.

§ 492.15 Stormwater Management.

(a) Stormwater management practices minimize runoff and increase infiltration which recharges groundwater and improves water quality. Implementing stormwater best management practices into the landscape and grading design plans to minimize runoff and to increase on-site retention and infiltration are encouraged.

(b) Project applicants shall refer to the local agency or Regional Water Quality Control Board for information on any applicable stormwater ordinances and stormwater management plans.

(c) Rain gardens, cisterns, and other landscapes features and practices that increase rainwater capture and create opportunities for infiltration and/or onsite storage are recommended.

Note: Authority Cited: Section 65595, Government Code. Reference: Section 65596, Government Code.

§ 492.16 Public Education.

(a) Publications. Education is a critical component to promote the efficient use of water in landscapes. The use of appropriate principles of design, installation, management and maintenance that save water is encouraged in the community.

(1) A local agency shall provide information to owners of new, single-family residential homes regarding the design, installation, management, and maintenance of water efficient landscapes.

(b) Model Homes. All model homes that are landscaped shall use signs and written information to demonstrate the principles of water efficient landscapes described in this ordinance.

(1) Signs shall be used to identify the model as an example of a water efficient landscape featuring elements such as hydrozones, irrigation equipment, and others that contribute to the overall water efficient theme.

(2) Information shall be provided about designing, installing, managing, and maintaining water efficient landscapes.

Note: Authority Cited: Section 65595, Government Code. Reference: Section 65596, Government Code.

§ 492.17 Environmental Review.

(a) The local agency must comply with the California Environmental Quality Act (CEQA), as appropriate.

Note: Authority cited: Section 21082, Public Resources Code. Reference: Sections 21080, 21082, Public Resources Code.

§ 493. Provisions for Existing Landscapes.

(a) A local agency may designate another agency, such as a water purveyor, to implement some or all of the requirements contained in this ordinance. Local agencies may collaborate with water purveyors to define each entity's specific responsibilities relating to this ordinance.

Note: Authority Cited: Section 65595, Government Code. Reference: Section 65596, Government Code.

§ 493.1 Irrigation Audit, Irrigation Survey, and Irrigation Water Use Analysis.

(a) This section, 493.1, shall apply to all existing landscapes that were installed before January 1, 2010 and are over one acre in size.

(1) For all landscapes in 493.1(a) that have a water meter, the local agency shall administer programs that may include, but not be limited to, irrigation water use analyses, irrigation surveys, and irrigation audits to evaluate water use and provide recommendations as necessary to reduce landscape water use to a level that does not exceed the Maximum Applied Water Allowance for existing landscapes. The Maximum Applied Water Allowance for existing landscapes shall be calculated as: $MAWA = (0.8)(ET_o)(LA)(0.62)$.

(2) For all landscapes in 493.1(a), that do not have a meter, the local agency shall administer programs that may include, but not be limited to, irrigation surveys and irrigation audits to evaluate water use and provide recommendations as necessary in order to prevent water waste.

(b) All landscape irrigation audits shall be conducted by a certified landscape irrigation auditor.

Note: Authority Cited: Section 65595, Government Code. Reference: Section 65596, Government Code.

§ 493.2 Water Waste Prevention.

(a) Local agencies shall prevent water waste resulting from inefficient landscape irrigation by prohibiting runoff from leaving the target landscape due to low head drainage, overspray, or other similar conditions where water flows onto adjacent property, non-irrigated areas, walks, roadways, parking lots, or structures. Penalties for violation of these prohibitions shall be established locally.

(b) Restrictions regarding overspray and runoff may be modified if:

(1) the landscape area is adjacent to permeable surfacing and no runoff occurs; or

(2) the adjacent non-permeable surfaces are designed and constructed to drain entirely to landscaping.

Note: Authority cited: Section 65594, Government Code. Reference: Section 65596, Government Code.

§ 494. Effective Precipitation.

(a) A local agency may consider Effective Precipitation (25% of annual precipitation) in tracking water use and may use the following equation to calculate Maximum Applied Water Allowance:

$MAWA = (ET_o - Eppt)(0.62) [(0.7 \times LA) + (0.3 \times SLA)]$.

Note: Authority Cited: Section 65595, Government Code. Reference: Section 65596, Government Code.

Appendices.

Appendix A. Reference Evapotranspiration (ET_o) Table.

Appendix A - Reference Evapotranspiration (ETo) Table*													
County and City	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Annual ETo
ALAMEDA													
Fremont	1.5	1.9	3.4	4.7	5.4	6.3	6.7	6.0	4.5	3.4	1.8	1.5	47.0
Livermore	1.2	1.5	2.9	4.4	5.9	6.6	7.4	6.4	5.3	3.2	1.5	0.9	47.2
Oakland	1.5	1.5	2.8	3.9	5.1	5.3	6.0	5.5	4.8	3.1	1.4	0.9	41.8
Oakland Foothills	1.1	1.4	2.7	3.7	5.1	6.4	5.8	4.9	3.6	2.6	1.4	1.0	39.6
Pleasanton	0.8	1.5	2.9	4.4	5.6	6.7	7.4	6.4	4.7	3.3	1.5	1.0	46.2
Union City	1.4	1.8	3.1	4.2	5.4	5.9	6.4	5.7	4.4	3.1	1.5	1.2	44.2
ALPINE													
Markleeville	0.7	0.9	2.0	3.5	5.0	6.1	7.3	6.4	4.4	2.6	1.2	0.5	40.6
AMADOR													
Jackson	1.2	1.5	2.8	4.4	6.0	7.2	7.9	7.2	5.3	3.2	1.4	0.9	48.9
Shanandoah Valley	1.0	1.7	2.9	4.4	5.6	6.8	7.9	7.1	5.2	3.6	1.7	1.0	48.8
BUTTE													
Chico	1.2	1.8	2.9	4.7	6.1	7.4	8.5	7.3	5.4	3.7	1.7	1.0	51.7
Durham	1.1	1.8	3.2	5.0	6.5	7.4	7.8	6.9	5.3	3.6	1.7	1.0	51.1
Gridley	1.2	1.8	3.0	4.7	6.1	7.7	8.5	7.1	5.4	3.7	1.7	1.0	51.9
Oroville	1.2	1.7	2.8	4.7	6.1	7.6	8.5	7.3	5.3	3.7	1.7	1.0	51.5
CALAVERAS													
San Andreas	1.2	1.5	2.8	4.4	6.0	7.3	7.9	7.0	5.3	3.2	1.4	0.7	48.8
COLUSA													
Colusa	1.0	1.7	3.4	5.0	6.4	7.6	8.3	7.2	5.4	3.8	1.8	1.1	52.8
Williams	1.2	1.7	2.9	4.5	6.1	7.2	8.5	7.3	5.3	3.4	1.6	1.0	50.8
CONTRA COSTA													
Benicia	1.3	1.4	2.7	3.8	4.9	5.0	6.4	5.5	4.4	2.9	1.2	0.7	40.3
Brentwood	1.0	1.5	2.9	4.5	6.1	7.1	7.9	6.7	5.2	3.2	1.4	0.7	48.3
Concord	1.1	1.4	2.4	4.0	5.5	5.9	7.0	6.0	4.8	3.2	1.3	0.7	43.4
Courtland	0.9	1.5	2.9	4.4	6.1	6.9	7.9	6.7	5.3	3.2	1.4	0.7	48.0
Martinez	1.2	1.4	2.4	3.9	5.3	5.6	6.7	5.6	4.7	3.1	1.2	0.7	41.8
Moraga	1.2	1.5	3.4	4.2	5.5	6.1	6.7	5.9	4.6	3.2	1.6	1.0	44.9
Pittsburg	1.0	1.5	2.8	4.1	5.6	6.4	7.4	6.4	5.0	3.2	1.3	0.7	45.4
Walnut Creek	0.8	1.5	2.9	4.4	5.6	6.7	7.4	6.4	4.7	3.3	1.5	1.0	46.2
DEL NORTE													
Crescent City	0.5	0.9	2.0	3.0	3.7	3.5	4.3	3.7	3.0	2.0	0.9	0.5	27.7
EL DORADO													
Camino	0.9	1.7	2.5	3.9	5.9	7.2	7.8	6.8	5.1	3.1	1.5	0.9	47.3
FRESNO													
Clovis	1.0	1.5	3.2	4.8	6.4	7.7	8.5	7.3	5.3	3.4	1.4	0.7	51.4
Coalinga	1.2	1.7	3.1	4.6	6.2	7.2	8.5	7.3	5.3	3.4	1.6	0.7	50.9
Firebaugh	1.0	1.8	3.7	5.7	7.3	8.1	8.2	7.2	5.5	3.9	2.0	1.1	55.4
FivePoints	1.3	2.0	4.0	6.1	7.7	8.5	8.7	8.0	6.2	4.5	2.4	1.2	60.4
FRESNO													
Fresno	0.9	1.7	3.3	4.8	6.7	7.8	8.4	7.1	5.2	3.2	1.4	0.6	51.1
Fresno State	0.9	1.6	3.2	5.2	7.0	8.0	8.7	7.6	5.4	3.6	1.7	0.9	53.7
Friant	1.2	1.5	3.1	4.7	6.4	7.7	8.5	7.3	5.3	3.4	1.4	0.7	51.3
Kerman	0.9	1.5	3.2	4.8	6.6	7.7	8.4	7.2	5.3	3.4	1.4	0.7	51.2
Kingsburg	1.0	1.5	3.4	4.8	6.6	7.7	8.4	7.2	5.3	3.4	1.4	0.7	51.6
Mendota	1.5	2.5	4.6	6.2	7.9	8.6	8.8	7.5	5.9	4.5	2.4	1.5	61.7
Orange Cove	1.2	1.9	3.5	4.7	7.4	8.5	8.9	7.9	5.9	3.7	1.8	1.2	56.7
Panoche	1.1	2.0	4.0	5.6	7.8	8.5	8.3	7.3	5.6	3.9	1.8	1.2	57.2
Parlier	1.0	1.9	3.6	5.2	6.8	7.6	8.1	7.0	5.1	3.4	1.7	0.9	52.0
Reedley	1.1	1.5	3.2	4.7	6.4	7.7	8.5	7.3	5.3	3.4	1.4	0.7	51.3
Westlands	0.9	1.7	3.8	6.3	8.0	8.6	8.6	7.8	5.9	4.3	2.1	1.1	58.8

Appendix A - Reference Evapotranspiration (ETo) Table*													
County and City	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Annual ETo
GLENN													
Orland	1.1	1.8	3.4	5.0	6.4	7.5	7.9	6.7	5.3	3.9	1.8	1.4	52.1
Willows	1.2	1.7	2.9	4.7	6.1	7.2	8.5	7.3	5.3	3.6	1.7	1.0	51.3
HUMBOLDT													
Eureka	0.5	1.1	2.0	3.0	3.7	3.7	3.7	3.7	3.0	2.0	0.9	0.5	27.5
Ferndale	0.5	1.1	2.0	3.0	3.7	3.7	3.7	3.7	3.0	2.0	0.9	0.5	27.5
Garberville	0.6	1.2	2.2	3.1	4.5	5.0	5.5	4.9	3.8	2.4	1.0	0.7	34.9
Hoopa	0.5	1.1	2.1	3.0	4.4	5.4	6.1	5.1	3.8	2.4	0.9	0.7	35.6
IMPERIAL													
Brawley	2.8	3.8	5.9	8.0	10.4	11.5	11.7	10.0	8.4	6.2	3.5	2.1	84.2
Calipatria/Mulberry	2.4	3.2	5.1	6.8	8.6	9.2	9.2	8.6	7.0	5.2	3.1	2.3	70.7
El Centro	2.7	3.5	5.6	7.9	10.1	11.1	11.6	9.5	8.3	6.1	3.3	2.0	81.7
Holtville	2.8	3.8	5.9	7.9	10.4	11.6	12.0	10.0	8.6	6.2	3.5	2.1	84.7
Meloland	2.5	3.2	5.5	7.5	8.9	9.2	9.0	8.5	6.8	5.3	3.1	2.2	71.6
Palo Verde II	2.5	3.3	5.7	6.9	8.5	8.9	8.6	7.9	6.2	4.5	2.9	2.3	68.2
Seeley	2.7	3.5	5.9	7.7	9.7	10.1	9.3	8.3	6.9	5.5	3.4	2.2	75.4
Westmoreland	2.4	3.3	5.3	6.9	8.7	9.6	9.6	8.7	6.9	5.0	3.0	2.2	71.4
Yuma	2.5	3.4	5.3	6.9	8.7	9.6	9.6	8.7	6.9	5.0	3.0	2.2	71.6
INYO													
Bishop	1.7	2.7	4.8	6.7	8.2	10.9	7.4	9.6	7.4	4.8	2.5	1.6	68.3
Death Valley Jct	2.2	3.3	5.4	7.7	9.8	11.1	11.4	10.1	8.3	5.4	2.9	1.7	79.1
Independence	1.7	2.7	3.4	6.6	8.5	9.5	9.8	8.5	7.1	3.9	2.0	1.5	65.2
Lower Haiwee Res.	1.8	2.7	4.4	7.1	8.5	9.5	9.8	8.5	7.1	4.2	2.6	1.5	67.6
Oasis	2.7	2.8	5.9	8.0	10.4	11.7	11.6	10.0	8.4	6.2	3.4	2.1	83.1
KERN													
Arvin	1.2	1.8	3.5	4.7	6.6	7.4	8.1	7.3	5.3	3.4	1.7	1.0	51.9
Bakersfield	1.0	1.8	3.5	4.7	6.6	7.7	8.5	7.3	5.3	3.5	1.6	0.9	52.4
Bakersfield/Bonanza	1.2	2.2	3.7	5.7	7.4	8.2	8.7	7.8	5.7	4.0	2.1	1.2	57.9
Bakersfield/Greenlee	1.2	2.2	3.7	5.7	7.4	8.2	8.7	7.8	5.7	4.0	2.1	1.2	57.9
KERN													
Belridge	1.4	2.2	4.1	5.5	7.7	8.5	8.6	7.8	6.0	3.8	2.0	1.5	59.2
Blackwells Corner	1.4	2.1	3.8	5.4	7.0	7.8	8.5	7.7	5.8	3.9	1.9	1.2	56.6
Buttonwillow	1.0	1.8	3.2	4.7	6.6	7.7	8.5	7.3	5.4	3.4	1.5	0.9	52.0
China Lake	2.1	3.2	5.3	7.7	9.2	10.0	11.0	9.8	7.3	4.9	2.7	1.7	74.8
Delano	0.9	1.8	3.4	4.7	6.6	7.7	8.5	7.3	5.4	3.4	1.4	0.7	52.0
Famoso	1.3	1.9	3.5	4.8	6.7	7.6	8.0	7.3	5.5	3.5	1.7	1.3	53.1
Grapevine	1.3	1.8	3.1	4.4	5.6	6.8	7.6	6.8	5.9	3.4	1.9	1.0	49.5
Inyokern	2.0	3.1	4.9	7.3	8.5	9.7	11.0	9.4	7.1	5.1	2.6	1.7	72.4
Isabella Dam	1.2	1.4	2.8	4.4	5.8	7.3	7.9	7.0	5.0	3.2	1.7	0.9	48.4
Lamont	1.3	2.4	4.4	4.6	6.5	7.0	8.8	7.6	5.7	3.7	1.6	0.8	54.4
Lost Hills	1.6	2.2	3.7	5.1	6.8	7.8	8.7	7.8	5.7	4.0	2.1	1.6	57.1
McFarland/Kern	1.2	2.1	3.7	5.6	7.3	8.0	8.3	7.4	5.6	4.1	2.0	1.2	56.5
Shafter	1.0	1.7	3.4	5.0	6.6	7.7	8.3	7.3	5.4	3.4	1.5	0.9	52.1
Taft	1.3	1.8	3.1	4.3	6.2	7.3	8.5	7.3	5.4	3.4	1.7	1.0	51.2
Tehachapi	1.4	1.8	3.2	5.0	6.1	7.7	7.9	7.3	5.9	3.4	2.1	1.2	52.9
KINGS													
Caruthers	1.6	2.5	4.0	5.7	7.8	8.7	9.3	8.4	6.3	4.4	2.4	1.6	62.7
Corcoran	1.6	2.2	3.7	5.1	6.8	7.8	8.7	7.8	5.7	4.0	2.1	1.6	57.1
Hanford	0.9	1.5	3.4	5.0	6.6	7.7	8.3	7.2	5.4	3.4	1.4	0.7	51.5
Kettleman	1.1	2.0	4.0	6.0	7.5	8.5	9.1	8.2	6.1	4.5	2.2	1.1	60.2
Lemoore	0.9	1.5	3.4	5.0	6.6	7.7	8.3	7.3	5.4	3.4	1.4	0.7	51.7
Stratford	0.9	1.9	3.9	6.1	7.8	8.6	8.8	7.7	5.9	4.1	2.1	1.0	58.7

Appendix A - Reference Evapotranspiration (ETo) Table*													
County and City	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Annual ETo
LAKE													
Lakeport	1.1	1.3	2.6	3.5	5.1	6.0	7.3	6.1	4.7	2.9	1.2	0.9	42.8
Lower Lake	1.2	1.4	2.7	4.5	5.3	6.3	7.4	6.4	5.0	3.1	1.3	0.9	45.4
LASSEN													
Buntingville	1.0	1.7	3.5	4.9	6.2	7.3	8.4	7.5	5.4	3.4	1.5	0.9	51.8
Ravendale	0.6	1.1	2.3	4.1	5.6	6.7	7.9	7.3	4.7	2.8	1.2	0.5	44.9
Susanville	0.7	1.0	2.2	4.1	5.6	6.5	7.8	7.0	4.6	2.8	1.2	0.5	44.0
LOS ANGELES													
Burbank	2.1	2.8	3.7	4.7	5.1	6.0	6.6	6.7	5.4	4.0	2.6	2.0	51.7
Claremont	2.0	2.3	3.4	4.6	5.0	6.0	7.0	7.0	5.3	4.0	2.7	2.1	51.3
El Dorado	1.7	2.2	3.6	4.8	5.1	5.7	5.9	5.9	4.4	3.2	2.2	1.7	46.3
Glendale	2.0	2.2	3.3	3.8	4.7	4.8	5.7	5.6	4.3	3.3	2.2	1.8	43.7
Glendora	2.0	2.5	3.6	4.9	5.4	6.1	7.3	6.8	5.7	4.2	2.6	2.0	53.1
Gorman	1.6	2.2	3.4	4.6	5.5	7.4	7.7	7.1	5.9	3.6	2.4	1.1	52.4
Hollywood Hills	2.1	2.2	3.8	5.4	6.0	6.5	6.7	6.4	5.2	3.7	2.8	2.1	52.8
Lancaster	2.1	3.0	4.6	5.9	8.5	9.7	11.0	9.8	7.3	4.6	2.8	1.7	71.1
Long Beach	1.8	2.1	3.3	3.9	4.5	4.3	5.3	4.7	3.7	2.8	1.8	1.5	39.7
Los Angeles	2.2	2.7	3.7	4.7	5.5	5.8	6.2	5.9	5.0	3.9	2.6	1.9	50.1
LOS ANGELES													
Monrovia	2.2	2.3	3.8	4.3	5.5	5.9	6.9	6.4	5.1	3.2	2.5	2.0	50.2
Palmdale	2.0	2.6	4.6	6.2	7.3	8.9	9.8	9.0	6.5	4.7	2.7	2.1	66.2
Pasadena	2.1	2.7	3.7	4.7	5.1	6.0	7.1	6.7	5.6	4.2	2.6	2.0	52.3
Pearblossom	1.7	2.4	3.7	4.7	7.3	7.7	9.9	7.9	6.4	4.0	2.6	1.6	59.9
Pomona	1.7	2.0	3.4	4.5	5.0	5.8	6.5	6.4	4.7	3.5	2.3	1.7	47.5
Redondo Beach	2.2	2.4	3.3	3.8	4.5	4.7	5.4	4.8	4.4	2.8	2.4	2.0	42.6
San Fernando	2.0	2.7	3.5	4.6	5.5	5.9	7.3	6.7	5.3	3.9	2.6	2.0	52.0
Santa Clarita	2.8	2.8	4.1	5.6	6.0	6.8	7.6	7.8	5.8	5.2	3.7	3.2	61.5
Santa Monica	1.8	2.1	3.3	4.5	4.7	5.0	5.4	5.4	3.9	3.4	2.4	2.2	44.2
MADERA													
Chowchilla	1.0	1.4	3.2	4.7	6.6	7.8	8.5	7.3	5.3	3.4	1.4	0.7	51.4
Madera	0.9	1.4	3.2	4.8	6.6	7.8	8.5	7.3	5.3	3.4	1.4	0.7	51.5
Raymond	1.2	1.5	3.0	4.6	6.1	7.6	8.4	7.3	5.2	3.4	1.4	0.7	50.5
MARIN													
Black Point	1.1	1.7	3.0	4.2	5.2	6.2	6.6	5.8	4.3	2.8	1.3	0.9	43.0
Novato	1.3	1.5	2.4	3.5	4.4	6.0	5.9	5.4	4.4	2.8	1.4	0.7	39.8
Point San Pedro	1.1	1.7	3.0	4.2	5.2	6.2	6.6	5.8	4.3	2.8	1.3	0.9	43.0
San Rafael	1.2	1.3	2.4	3.3	4.0	4.8	4.8	4.9	4.3	2.7	1.3	0.7	35.8
MARIPOSA													
Coulterville	1.1	1.5	2.8	4.4	5.9	7.3	8.1	7.0	5.3	3.4	1.4	0.7	48.8
Mariposa	1.1	1.5	2.8	4.4	5.9	7.4	8.2	7.1	5.0	3.4	1.4	0.7	49.0
Yosemite Village	0.7	1.0	2.3	3.7	5.1	6.5	7.1	6.1	4.4	2.9	1.1	0.6	41.4
MENDOCINO													
Fort Bragg	0.9	1.3	2.2	3.0	3.7	3.5	3.7	3.7	3.0	2.3	1.2	0.7	29.0
Hopland	1.1	1.3	2.6	3.4	5.0	5.9	6.5	5.7	4.5	2.8	1.3	0.7	40.9
Point Arena	1.0	1.3	2.3	3.0	3.7	3.9	3.7	3.7	3.0	2.3	1.2	0.7	29.6
Sanel Valley	1.0	1.6	3.0	4.6	6.0	7.0	8.0	7.0	5.2	3.4	1.4	0.9	49.1
Ukiah	1.0	1.3	2.6	3.3	5.0	5.8	6.7	5.9	4.5	2.8	1.3	0.7	40.9
MERCED													
Kesterson	0.9	1.7	3.4	5.5	7.3	8.2	8.6	7.4	5.5	3.8	1.8	0.9	55.1
Los Banos	1.0	1.5	3.2	4.7	6.1	7.4	8.2	7.0	5.3	3.4	1.4	0.7	50.0
Merced	1.0	1.5	3.2	4.7	6.6	7.9	8.5	7.2	5.3	3.4	1.4	0.7	51.5

Appendix A - Reference Evapotranspiration (ETo) Table*													
County and City	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Annual ETo
MODOC													
Modoc/Alturas	0.9	1.4	2.8	3.7	5.1	6.2	7.5	6.6	4.6	2.8	1.2	0.7	43.2
MONO													
Bridgeport	0.7	0.9	2.2	3.8	5.5	6.6	7.4	6.7	4.7	2.7	1.2	0.5	43.0
MONTEREY													
Arroyo Seco	1.5	2.0	3.7	5.4	6.3	7.3	7.2	6.7	5.0	3.9	2.0	1.6	52.6
Castroville	1.4	1.7	3.0	4.2	4.6	4.8	4.0	3.8	3.0	2.6	1.6	1.4	36.2
Gonzales	1.3	1.7	3.4	4.7	5.4	6.3	6.3	5.9	4.4	3.4	1.9	1.3	45.7
MONTEREY													
Greenfield	1.8	2.2	3.4	4.8	5.6	6.3	6.5	6.2	4.8	3.7	2.4	1.8	49.5
King City	1.7	2.0	3.4	4.4	4.4	5.6	6.1	6.7	6.5	5.2	2.2	1.3	49.6
King City-Oasis Rd.	1.4	1.9	3.6	5.3	6.5	7.3	7.4	6.8	5.1	4.0	2.0	1.5	52.7
Long Valley	1.5	1.9	3.2	4.1	5.8	6.5	7.3	6.7	5.3	3.6	2.0	1.2	49.1
Monterey	1.7	1.8	2.7	3.5	4.0	4.1	4.3	4.2	3.5	2.8	1.9	1.5	36.0
Pajaro	1.8	2.2	3.7	4.8	5.3	5.7	5.6	5.3	4.3	3.4	2.4	1.8	46.1
Salinas	1.6	1.9	2.7	3.8	4.8	4.7	5.0	4.5	4.0	2.9	1.9	1.3	39.1
Salinas North	1.2	1.5	2.9	4.1	4.6	5.2	4.5	4.3	3.2	2.8	1.5	1.2	36.9
San Ardo	1.0	1.7	3.1	4.5	5.9	7.2	8.1	7.1	5.1	3.1	1.5	1.0	49.0
San Juan	1.8	2.1	3.4	4.6	5.3	5.7	5.5	4.9	3.8	3.2	2.2	1.9	44.2
Soledad	1.7	2.0	3.4	4.4	5.5	5.4	6.5	6.2	5.2	3.7	2.2	1.5	47.7
NAPA													
Angwin	1.8	1.9	3.2	4.7	5.8	7.3	8.1	7.1	5.5	4.5	2.9	2.1	54.9
Carneros	0.8	1.5	3.1	4.6	5.5	6.6	6.9	6.2	4.7	3.5	1.4	1.0	45.8
Oakville	1.0	1.5	2.9	4.7	5.8	6.9	7.2	6.4	4.9	3.5	1.6	1.2	47.7
St Helena	1.2	1.5	2.8	3.9	5.1	6.1	7.0	6.2	4.8	3.1	1.4	0.9	44.1
Yountville	1.3	1.7	2.8	3.9	5.1	6.0	7.1	6.1	4.8	3.1	1.5	0.9	44.3
NEVADA													
Grass Valley	1.1	1.5	2.6	4.0	5.7	7.1	7.9	7.1	5.3	3.2	1.5	0.9	48.0
Nevada City	1.1	1.5	2.6	3.9	5.8	6.9	7.9	7.0	5.3	3.2	1.4	0.9	47.4
ORANGE													
Irvine	2.2	2.5	3.7	4.7	5.2	5.9	6.3	6.2	4.6	3.7	2.6	2.3	49.6
Laguna Beach	2.2	2.7	3.4	3.8	4.6	4.6	4.9	4.9	4.4	3.4	2.4	2.0	43.2
Santa Ana	2.2	2.7	3.7	4.5	4.6	5.4	6.2	6.1	4.7	3.7	2.5	2.0	48.2
PLACER													
Auburn	1.2	1.7	2.8	4.4	6.1	7.4	8.3	7.3	5.4	3.4	1.6	1.0	50.6
Blue Canyon	0.7	1.1	2.1	3.4	4.8	6.0	7.2	6.1	4.6	2.9	0.9	0.6	40.5
Colfax	1.1	1.5	2.6	4.0	5.8	7.1	7.9	7.0	5.3	3.2	1.4	0.9	47.9
Roseville	1.1	1.7	3.1	4.7	6.2	7.7	8.5	7.3	5.6	3.7	1.7	1.0	52.2
Soda Springs	0.7	0.7	1.8	3.0	4.3	5.3	6.2	5.5	4.1	2.5	0.7	0.7	35.4
Tahoe City	0.7	0.7	1.7	3.0	4.3	5.4	6.1	5.6	4.1	2.4	0.8	0.6	35.5
Truckee	0.7	0.7	1.7	3.2	4.4	5.4	6.4	5.7	4.1	2.4	0.8	0.6	36.2
PLUMAS													
Portola	0.7	0.9	1.9	3.5	4.9	5.9	7.3	5.9	4.3	2.7	0.9	0.5	39.4
Quincy	0.7	0.9	2.2	3.5	4.9	5.9	7.3	5.9	4.4	2.8	1.2	0.5	40.2
RIVERSIDE													
Beaumont	2.0	2.3	3.4	4.4	6.1	7.1	7.6	7.9	6.0	3.9	2.6	1.7	55.0
Blythe	2.4	3.3	5.3	6.9	8.7	9.6	9.6	8.7	6.9	5.0	3.0	2.2	71.4
Cathedral City	1.6	2.2	3.7	5.1	6.8	7.8	8.7	7.8	5.7	4.0	2.1	1.6	57.1
Coachella	2.9	4.4	6.2	8.4	10.5	11.9	12.3	10.1	8.9	6.2	3.8	2.4	88.1

Appendix A - Reference Evapotranspiration (ET_o) Table*

County and City	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Annual ET _o
RIVERSIDE													
Desert Center	2.9	4.1	6.4	8.5	11.0	12.1	12.2	11.1	9.0	6.4	3.9	2.6	90.0
Elsinore	2.1	2.8	3.9	4.4	5.9	7.1	7.6	7.0	5.8	3.9	2.6	1.9	55.0
Indio	3.1	3.6	6.5	8.3	10.5	11.0	10.8	9.7	8.3	5.9	3.7	2.7	83.9
La Quinta	2.4	2.8	5.2	6.5	8.3	8.7	8.5	7.9	6.5	4.5	2.7	2.2	66.2
Mecca	2.6	3.3	5.7	7.2	8.6	9.0	8.8	8.2	6.8	5.0	3.2	2.4	70.8
Oasis	2.9	3.3	5.3	6.1	8.5	8.9	8.7	7.9	6.9	4.8	2.9	2.3	68.4
Palm Deser	2.5	3.4	5.3	6.9	8.7	9.6	9.6	8.7	6.9	5.0	3.0	2.2	71.6
Palm Springs	2.0	2.9	4.9	7.2	8.3	8.5	11.6	8.3	7.2	5.9	2.7	1.7	71.1
Rancho California	1.8	2.2	3.4	4.8	5.6	6.3	6.5	6.2	4.8	3.7	2.4	1.8	49.5
Rancho Mirage	2.4	3.3	5.3	6.9	8.7	9.6	9.6	8.7	6.9	5.0	3.0	2.2	71.4
Ripley	2.7	3.3	5.6	7.2	8.7	8.7	8.4	7.6	6.2	4.6	2.8	2.2	67.8
Salton Sea North	2.5	3.3	5.5	7.2	8.8	9.3	9.2	8.5	6.8	5.2	3.1	2.3	71.7
Temecula East II	2.3	2.4	4.1	4.9	6.4	7.0	7.8	7.4	5.7	4.1	2.6	2.2	56.7
Thermal	2.4	3.3	5.5	7.6	9.1	9.6	9.3	8.6	7.1	5.2	3.1	2.1	72.8
Riverside UC	2.5	2.9	4.2	5.3	5.9	6.6	7.2	6.9	5.4	4.1	2.9	2.6	56.4
Winchester	2.3	2.4	4.1	4.9	6.4	6.9	7.7	7.5	6.0	3.9	2.6	2.1	56.8
SACRAMENTO													
Fair Oaks	1.0	1.6	3.4	4.1	6.5	7.5	8.1	7.1	5.2	3.4	1.5	1.0	50.5
Sacramento	1.0	1.8	3.2	4.7	6.4	7.7	8.4	7.2	5.4	3.7	1.7	0.9	51.9
Twitchell Island	1.2	1.8	3.9	5.3	7.4	8.8	9.1	7.8	5.9	3.8	1.7	1.2	57.9
SAN BENITO													
Hollister	1.5	1.8	3.1	4.3	5.5	5.7	6.4	5.9	5.0	3.5	1.7	1.1	45.1
San Benito	1.2	1.6	3.1	4.6	5.6	6.4	6.9	6.5	4.8	3.7	1.7	1.2	47.2
San Juan Valley	1.4	1.8	3.4	4.5	6.0	6.7	7.1	6.4	5.0	3.5	1.8	1.4	49.1
SAN BERNARDINO													
Baker	2.7	3.9	6.1	8.3	10.4	11.8	12.2	11.0	8.9	6.1	3.3	2.1	86.6
Barstow NE	2.2	2.9	5.3	6.9	9.0	10.1	9.9	8.9	6.8	4.8	2.7	2.1	71.7
Big Bear Lake	1.8	2.6	4.6	6.0	7.0	7.6	8.1	7.4	5.4	4.1	2.4	1.8	58.6
Chino	2.1	2.9	3.9	4.5	5.7	6.5	7.3	7.1	5.9	4.2	2.6	2.0	54.6
Crestline	1.5	1.9	3.3	4.4	5.5	6.6	7.8	7.1	5.4	3.5	2.2	1.6	50.8
Lake Arrowhead	1.8	2.6	4.6	6.0	7.0	7.6	8.1	7.4	5.4	4.1	2.4	1.8	58.6
Lucerne Valley	2.2	2.9	5.1	6.5	9.1	11.0	11.4	9.9	7.4	5.0	3.0	1.8	75.3
Needles	3.2	4.2	6.6	8.9	11.0	12.4	12.8	11.0	8.9	6.6	4.0	2.7	92.1
Newberry Springs	2.1	2.9	5.3	8.4	9.8	10.9	11.1	9.9	7.6	5.2	3.1	2.0	78.2
San Bernardino	2.0	2.7	3.8	4.6	5.7	6.9	7.9	7.4	5.9	4.2	2.6	2.0	55.6
Twentynine Palms	2.6	3.6	5.9	7.9	10.1	11.2	11.2	10.3	8.6	5.9	3.4	2.2	82.9
Victorville	2.0	2.6	4.6	6.2	7.3	8.9	9.8	9.0	6.5	4.7	2.7	2.1	66.2
SAN DIEGO													
Chula Vista	2.2	2.7	3.4	3.8	4.9	4.7	5.5	4.9	4.5	3.4	2.4	2.0	44.2
Escondido SPV	2.4	2.6	3.9	4.7	5.9	6.5	7.1	6.7	5.3	3.9	2.8	2.3	54.2
SAN DIEGO													
Miramar	2.3	2.5	3.7	4.1	5.1	5.4	6.1	5.8	4.5	3.3	2.4	2.1	47.1
Oceanside	2.2	2.7	3.4	3.7	4.9	4.6	4.6	5.1	4.1	3.3	2.4	2.0	42.9
Otay Lake	2.3	2.7	3.9	4.6	5.6	5.9	6.2	6.1	4.8	3.7	2.6	2.2	50.4
Pine Valley	1.5	2.4	3.8	5.1	6.0	7.0	7.8	7.3	6.0	4.0	2.2	1.7	54.8
Ramona	2.1	2.1	3.4	4.6	5.2	6.3	6.7	6.8	5.3	4.1	2.8	2.1	51.6
San Diego	2.1	2.4	3.4	4.6	5.1	5.3	5.7	5.6	4.3	3.6	2.4	2.0	46.5
Santee	2.1	2.7	3.7	4.5	5.5	6.1	6.6	6.2	5.4	3.8	2.6	2.0	51.1
Torrey Pines	2.2	2.3	3.4	3.9	4.0	4.1	4.6	4.7	3.8	2.8	2.0	2.0	39.8
Warner Springs	1.6	2.7	3.7	4.7	5.7	7.6	8.3	7.7	6.3	4.0	2.5	1.3	56.0

Appendix A - Reference Evapotranspiration (ETo) Table*													
County and City	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Annual ETo
SAN FRANCISCO													
San Francisco	1.5	1.3	2.4	3.0	3.7	4.6	4.9	4.8	4.1	2.8	1.3	0.7	35.1
SAN JOAQUIN													
Farmington	1.5	1.5	2.9	4.7	6.2	7.6	8.1	6.8	5.3	3.3	1.4	0.7	50.0
Lodi West	1.0	1.6	3.3	4.3	6.3	6.9	7.3	6.4	4.5	3.0	1.4	0.8	46.7
Manteca	0.9	1.7	3.4	5.0	6.5	7.5	8.0	7.1	5.2	3.3	1.6	0.9	51.2
Stockton	0.8	1.5	2.9	4.7	6.2	7.4	8.1	6.8	5.3	3.2	1.4	0.6	49.1
Tracy	1.0	1.5	2.9	4.5	6.1	7.3	7.9	6.7	5.3	3.2	1.3	0.7	48.5
SAN LUIS OBISPO													
Arroyo Grande	2.0	2.2	3.2	3.8	4.3	4.7	4.3	4.6	3.8	3.2	2.4	1.7	40.0
Atascadero	1.2	1.5	2.8	3.9	4.5	6.0	6.7	6.2	5.0	3.2	1.7	1.0	43.7
Morro Bay	2.0	2.2	3.1	3.5	4.3	4.5	4.6	4.6	3.8	3.5	2.1	1.7	39.9
Nipomo	2.2	2.5	3.8	5.1	5.7	6.2	6.4	6.1	4.9	4.1	2.9	2.3	52.1
Paso Robles	1.6	2.0	3.2	4.3	5.5	6.3	7.3	6.7	5.1	3.7	2.1	1.4	49.0
San Luis Obispo	2.0	2.2	3.2	4.1	4.9	5.3	4.6	5.5	4.4	3.5	2.4	1.7	43.8
San Miguel	1.6	2.0	3.2	4.3	5.0	6.4	7.4	6.8	5.1	3.7	2.1	1.4	49.0
San Simeon	2.0	2.0	2.9	3.5	4.2	4.4	4.6	4.3	3.5	3.1	2.0	1.7	38.1
SAN MATEO													
Hal Moon Bay	1.5	1.7	2.4	3.0	3.9	4.3	4.3	4.2	3.5	2.8	1.3	1.0	33.7
Redwood City	1.5	1.8	2.9	3.8	5.2	5.3	6.2	5.6	4.8	3.1	1.7	1.0	42.8
Woodside	1.8	2.2	3.4	4.8	5.6	6.3	6.5	6.2	4.8	3.7	2.4	1.8	49.5
SANTA BARBARA													
Betteravia	2.1	2.6	4.0	5.2	6.0	5.9	5.8	5.4	4.1	3.3	2.7	2.1	49.1
Carpenteria	2.0	2.4	3.2	3.9	4.8	5.2	5.5	5.7	4.5	3.4	2.4	2.0	44.9
Cuyama	2.1	2.4	3.8	5.4	6.9	7.9	8.5	7.7	5.9	4.5	2.6	2.0	59.7
Goleta	2.1	2.5	3.9	5.1	5.7	5.7	5.4	5.4	4.2	3.2	2.8	2.2	48.1
Goleta Foothills	2.3	2.6	3.7	5.4	5.3	5.6	5.5	5.7	4.5	3.9	2.8	2.3	49.6
Guadalupe	2.0	2.2	3.2	3.7	4.9	4.6	4.5	4.6	4.1	3.3	2.4	1.7	41.1
Lompoc	2.0	2.2	3.2	3.7	4.8	4.6	4.9	4.8	3.9	3.2	2.4	1.7	41.1
Los Alamos	1.8	2.0	3.2	4.1	4.9	5.3	5.7	5.5	4.4	3.7	2.4	1.6	44.6
Santa Barbara	2.0	2.5	3.2	3.8	4.6	5.1	5.5	4.5	3.4	2.4	1.8	1.8	40.6
SANTA BARBARA													
Santa Maria	1.8	2.3	3.7	5.1	5.7	5.8	5.6	5.3	4.2	3.5	2.4	1.9	47.4
Santa Ynez	1.7	2.2	3.5	5.0	5.8	6.2	6.4	6.0	4.5	3.6	2.2	1.7	48.7
Sisquoc	2.1	2.5	3.8	4.1	6.1	6.3	6.4	5.8	4.7	3.4	2.3	1.8	49.2
Solvang	2.0	2.0	3.3	4.3	5.0	5.6	6.1	5.6	4.4	3.7	2.2	1.6	45.6
SANTA CLARA													
Gilroy	1.3	1.8	3.1	4.1	5.3	5.6	6.1	5.5	4.7	3.4	1.7	1.1	43.6
Los Gatos	1.5	1.8	2.8	3.9	5.0	5.6	6.2	5.5	4.7	3.2	1.7	1.1	42.9
Morgan Hill	1.5	1.8	3.4	4.2	6.3	7.0	7.1	6.0	5.1	3.7	1.9	1.4	49.5
Palo Alto	1.5	1.8	2.8	3.8	5.2	5.3	6.2	5.6	5.0	3.2	1.7	1.0	43.0
San Jose	1.5	1.8	3.1	4.1	5.5	5.8	6.5	5.9	5.2	3.3	1.8	1.0	45.3
SANTA CRUZ													
De Laveaga	1.4	1.9	3.3	4.7	4.9	5.3	5.0	4.8	3.6	3.0	1.6	1.3	40.8
Green Valley Rd	1.2	1.8	3.2	4.5	4.6	5.4	5.2	5.0	3.7	3.1	1.6	1.3	40.6
Santa Cruz	1.5	1.8	2.6	3.5	4.3	4.4	4.8	4.4	3.8	2.8	1.7	1.2	36.6
Watsonville	1.5	1.8	2.7	3.7	4.6	4.5	4.9	4.2	4.0	2.9	1.8	1.2	37.7
Webb	1.8	2.2	3.7	4.8	5.3	5.7	5.6	5.3	4.3	3.4	2.4	1.8	46.2

Appendix A - Reference Evapotranspiration (ETo) Table*													
County and City	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Annual ETo
SHASTA													
Burney	0.7	1.0	2.1	3.5	4.9	5.9	7.4	6.4	4.4	2.9	0.9	0.6	40.9
Fall River Mills	0.6	1.0	2.1	3.7	5.0	6.1	7.8	6.7	4.6	2.8	0.9	0.5	41.8
Glenburn	0.6	1.0	2.1	3.7	5.0	6.3	7.8	6.7	4.7	2.8	0.9	0.6	42.1
McArthur	0.7	1.4	2.9	4.2	5.6	6.9	8.2	7.2	5.0	3.0	1.1	0.6	46.8
Redding	1.2	1.4	2.6	4.1	5.6	7.1	8.5	7.3	5.3	3.2	1.4	0.9	48.8
SIERRA													
Downieville	0.7	1.0	2.3	3.5	5.0	6.0	7.4	6.2	4.7	2.8	0.9	0.6	41.3
Sierraville	0.7	1.1	2.2	3.2	4.5	5.9	7.3	6.4	4.3	2.6	0.9	0.5	39.6
SISKIYOU													
Happy Camp	0.5	0.9	2.0	3.0	4.3	5.2	6.1	5.3	4.1	2.4	0.9	0.5	35.1
MacDoel	1.0	1.7	3.1	4.5	5.9	7.2	8.1	7.1	5.1	3.1	1.5	1.0	49.0
Mt Shasta	0.5	0.9	2.0	3.0	4.5	5.3	6.7	5.7	4.0	2.2	0.7	0.5	36.0
Tule lake FS	0.7	1.3	2.7	4.0	5.4	6.3	7.1	6.4	4.7	2.8	1.0	0.6	42.9
Weed	0.5	0.9	2.0	2.5	4.5	5.3	6.7	5.5	3.7	2.0	0.9	0.5	34.9
Yreka	0.6	0.9	2.1	3.0	4.9	5.8	7.3	6.5	4.3	2.5	0.9	0.5	39.2
SOLANO													
Dixon	0.7	1.4	3.2	5.2	6.3	7.6	8.2	7.2	5.5	4.3	1.6	1.1	52.1
Fairfield	1.1	1.7	2.8	4.0	5.5	6.1	7.8	6.0	4.8	3.1	1.4	0.9	45.2
Hastings Tract	1.6	2.2	3.7	5.1	6.8	7.8	8.7	7.8	5.7	4.0	2.1	1.6	57.1
Putah Creek	1.0	1.6	3.2	4.9	6.1	7.3	7.9	7.0	5.3	3.8	1.8	1.2	51.0
Rio Vista	0.9	1.7	2.8	4.4	5.9	6.7	7.9	6.5	5.1	3.2	1.3	0.7	47.0
Suisun Valley	0.6	1.3	3.0	4.7	5.8	7.0	7.7	6.8	5.3	3.8	1.4	0.9	48.3
Winters	0.9	1.7	3.3	5.0	6.4	7.5	7.9	7.0	5.2	3.5	1.6	1.0	51.0
SONOMA													
Bennett Valley	1.1	1.7	3.2	4.1	5.5	6.5	6.6	5.7	4.5	3.1	1.5	0.9	44.4
Cloverdale	1.1	1.4	2.6	3.4	5.0	5.9	6.2	5.6	4.5	2.8	1.4	0.7	40.7
Fort Ross	1.2	1.4	2.2	3.0	3.7	4.5	4.2	4.3	3.4	2.4	1.2	0.5	31.9
Healdsburg	1.2	1.5	2.4	3.5	5.0	5.9	6.1	5.6	4.5	2.8	1.4	0.7	40.8
Lincoln	1.2	1.7	2.8	4.7	6.1	7.4	8.4	7.3	5.4	3.7	1.9	1.2	51.9
Petaluma	1.2	1.5	2.8	3.7	4.6	5.6	4.6	5.7	4.5	2.9	1.4	0.9	39.6
Santa Rosa	1.2	1.7	2.8	3.7	5.0	6.0	6.1	5.9	4.5	2.9	1.5	0.7	42.0
Valley of the Moon	1.0	1.6	3.0	4.5	5.6	6.6	7.1	6.3	4.7	3.3	1.5	1.0	46.1
Windsor	0.9	1.6	3.0	4.5	5.5	6.5	6.5	5.9	4.4	3.2	1.4	1.0	44.2
Denair	1.0	1.9	3.6	4.7	7.0	7.9	8.0	6.1	5.3	3.4	1.5	1.0	51.4
La Grange	1.2	1.5	3.1	4.7	6.2	7.7	8.5	7.3	5.3	3.4	1.4	0.7	51.2
Modesto	0.9	1.4	3.2	4.7	6.4	7.7	8.1	6.8	5.0	3.4	1.4	0.7	49.7
Newman	1.0	1.5	3.2	4.6	6.2	7.4	8.1	6.7	5.0	3.4	1.4	0.7	49.3
STANISLAUS													
Oakdale	1.2	1.5	3.2	4.7	6.2	7.7	8.1	7.1	5.1	3.4	1.4	0.7	50.3
Patterson	1.3	2.1	4.2	5.4	7.9	8.6	8.2	6.6	5.8	4.0	1.9	1.3	57.3
Turlock	0.9	1.5	3.2	4.7	6.5	7.7	8.2	7.0	5.1	3.4	1.4	0.7	50.2
SUTTER													
Nicolaus	0.9	1.6	3.2	4.9	6.3	7.5	8.0	6.9	5.2	3.4	1.5	0.9	50.2
Yuba City	1.3	2.1	2.8	4.4	5.7	7.2	7.1	6.1	4.7	3.2	1.2	0.9	46.7
TEHAMA													
Corning	1.2	1.8	2.9	4.5	6.1	7.3	8.1	7.2	5.3	3.7	1.7	1.1	50.7
Gerber	1.0	1.8	3.5	5.0	6.6	7.9	8.7	7.4	5.8	4.1	1.8	1.1	54.7
Gerber Dryland	0.9	1.6	3.2	4.7	6.7	8.4	9.0	7.9	6.0	4.2	2.0	1.0	55.5
Red Bluff	1.2	1.8	2.9	4.4	5.9	7.4	8.5	7.3	5.4	3.5	1.7	1.0	51.1

Appendix A - Reference Evapotranspiration (ETo) Table*													
County and City	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Annual ETo
TRINITY													
Hay Fork	0.5	1.1	2.3	3.5	4.9	5.9	7.0	6.0	4.5	2.8	0.9	0.7	40.1
Weaverville	0.6	1.1	2.2	3.3	4.9	5.9	7.3	6.0	4.4	2.7	0.9	0.7	40.0
TULARE													
Alpaugh	0.9	1.7	3.4	4.8	6.6	7.7	8.2	7.3	5.4	3.4	1.4	0.7	51.6
Badger	1.0	1.3	2.7	4.1	6.0	7.3	7.7	7.0	4.8	3.3	1.4	0.7	47.3
Delano	1.1	1.9	4.0	4.9	7.2	7.9	8.1	7.3	5.4	3.2	1.5	1.2	53.6
Dinuba	1.1	1.5	3.2	4.7	6.2	7.7	8.5	7.3	5.3	3.4	1.4	0.7	51.2
Lindcove	0.9	1.6	3.0	4.8	6.5	7.6	8.1	7.2	5.2	3.4	1.6	0.9	50.6
Porterville	1.2	1.8	3.4	4.7	6.6	7.7	8.5	7.3	5.3	3.4	1.4	0.7	52.1
Visalia	0.9	1.7	3.3	5.1	6.8	7.7	7.9	6.9	4.9	3.2	1.5	0.8	50.7
TUOLUMNE													
Groveland	1.1	1.5	2.8	4.1	5.7	7.2	7.9	6.6	5.1	3.3	1.4	0.7	47.5
Sonora	1.1	1.5	2.8	4.1	5.8	7.2	7.9	6.7	5.1	3.2	1.4	0.7	47.6
VENTURA													
Camarillo	2.2	2.5	3.7	4.3	5.0	5.2	5.9	5.4	4.2	3.0	2.5	2.1	46.1
Oxnard	2.2	2.5	3.2	3.7	4.4	4.6	5.4	4.8	4.0	3.3	2.4	2.0	42.3
Piru	2.8	2.8	4.1	5.6	6.0	6.8	7.6	7.8	5.8	5.2	3.7	3.2	61.5
Port Hueneme	2.0	2.3	3.3	4.6	4.9	4.9	4.9	5.0	3.7	3.2	2.5	2.2	43.5
Thousand Oaks	2.2	2.6	3.4	4.5	5.4	5.9	6.7	6.4	5.4	3.9	2.6	2.0	51.0
Ventura	2.2	2.6	3.2	3.8	4.6	4.7	5.5	4.9	4.1	3.4	2.5	2.0	43.5
YOLO													
Bryte	0.9	1.7	3.3	5.0	6.4	7.5	7.9	7.0	5.2	3.5	1.6	1.0	51.0
Davis	1.0	1.9	3.3	5.0	6.4	7.6	8.2	7.1	5.4	4.0	1.8	1.0	52.5
Esparto	1.0	1.7	3.4	5.5	6.9	8.1	8.5	7.5	5.8	4.2	2.0	1.2	55.8
Winters	1.7	1.7	2.9	4.4	5.8	7.1	7.9	6.7	5.3	3.3	1.6	1.0	49.4
Woodland	1.0	1.8	3.2	4.7	6.1	7.7	8.2	7.2	5.4	3.7	1.7	1.0	51.6
Zamora	1.1	1.9	3.5	5.2	6.4	7.4	7.8	7.0	5.5	4.0	1.9	1.2	52.8
YUBA													
Browns Valley	1.0	1.7	3.1	4.7	6.1	7.5	8.5	7.6	5.7	4.1	2.0	1.1	52.9
Brownsville	1.1	1.4	2.6	4.0	5.7	6.8	7.9	6.8	5.3	3.4	1.5	0.9	47.4
* The values in this table were derived from:													
1) California Irrigation Management Information System (CIMIS);													
2) Reference EvapoTranspiration Zones Map, UC Dept. of Land, Air & Water Resources and California Dept of Water Resources 1999; and													
3) Reference Evapotranspiration for California, University of California, Department of Agriculture and Natural Resources (1987) Bulletin 1922 4) Determining Daily Reference Evapotranspiration, Cooperative Extension UC Division of Agriculture and Natural Resources (1987), Publication Leaflet 21426													

SECTION B. WATER BUDGET CALCULATIONS

Section B1. Maximum Applied Water Allowance (MAWA)

The project's Maximum Applied Water Allowance shall be calculated using this equation:

$$\text{MAWA} = (\text{ETo}) (0.62) [(0.7 \times \text{LA}) + (0.3 \times \text{SLA})]$$

where:

- MAWA = Maximum Applied Water Allowance (gallons per year)
- ETo = Reference Evapotranspiration from Appendix A (inches per year)
- 0.7 = ET Adjustment Factor (ETAF)
- LA = Landscaped Area includes Special Landscape Area (square feet)
- 0.62 = Conversion factor (to gallons per square foot)
- SLA = Portion of the landscape area identified as Special Landscape Area (square feet)
- 0.3 = the additional ET Adjustment Factor for Special Landscape Area (1.0 - 0.7 = 0.3)

Maximum Applied Water Allowance = _____ gallons per year

Show calculations.

Effective Precipitation (Eppt)

If considering Effective Precipitation, use 25% of annual precipitation. Use the following equation to calculate Maximum Applied Water Allowance:

$$\text{MAWA} = (\text{ETo} - \text{Eppt}) (0.62) [(0.7 \times \text{LA}) + (0.3 \times \text{SLA})]$$

Maximum Applied Water Allowance = _____ gallons per year

Show calculations.

Section B2. Estimated Total Water Use (ETWU)

The project's Estimated Total Water Use is calculated using the following formula:

$$ETWU = (ETo)(0.62) \left(\frac{PF \times HA}{IE} + SLA \right)$$

where:

- ETWU = Estimated total water use per year (gallons per year)
- ETo = Reference Evapotranspiration (inches per year)
- PF = Plant Factor from WUCOLS (see Definitions)
- HA = Hydrozone Area [high, medium, and low water use areas] (square feet)
- SLA = Special Landscape Area (square feet)
- 0.62 = Conversion Factor (to gallons per square foot)
- IE = Irrigation Efficiency (minimum 0.71)

Hydrozone Table for Calculating ETWU

Please complete the hydrozone table(s). Use as many tables as necessary.

Hydrozone	Plant Water Use Type(s)	Plant Factor (PF)	Area (HA) (square feet)	PF x HA (square feet)
			Sum	
	SLA			

Estimated Total Water Use = _____ gallons

Show calculations.

Appendix C – Sample Certificate of Completion.

CERTIFICATE OF COMPLETION

This certificate is filled out by the project applicant upon completion of the landscape project.

PART 1. PROJECT INFORMATION SHEET

Date		
Project Name		
Name of Project Applicant	Telephone No.	
	Fax No.	
Title	Email Address	
Company	Street Address	
City	State	Zip Code

Project Address and Location:

Street Address		Parcel, tract or lot number, if available.
City		Latitude/Longitude (optional)
State	Zip Code	

Property Owner or his/her designee:

Name	Telephone No.	
	Fax No.	
Title	Email Address	
Company	Street Address	
City	State	Zip Code

Property Owner

"I/we certify that I/we have received copies of all the documents within the Landscape Documentation Package and the Certificate of Completion and that it is our responsibility to see that the project is maintained in accordance with the Landscape and Irrigation Maintenance Schedule."

Property Owner Signature Date

Please answer the questions below:

1. Date the Landscape Documentation Package was submitted to the local agency _____
2. Date the Landscape Documentation Package was approved by the local agency _____
3. Date that a copy of the Water Efficient Landscape Worksheet (including the Water Budget Calculation) was submitted to the local water purveyor _____

PART 2. CERTIFICATION OF INSTALLATION ACCORDING TO THE LANDSCAPE DOCUMENTATION PACKAGE

"I/we certify that based upon periodic site observations, the work has been substantially completed in accordance with the ordinance and that the landscape planting and irrigation installation conform with the criteria and specifications of the approved Landscape Documentation Package."

Signature*	Date	
Name (print)	Telephone No.	
	Fax No.	
Title	Email Address	
License No. or Certification No.		
Company	Street Address	
City	State	Zip Code

*Signer of the landscape design plan, signer of the irrigation plan, or a licensed landscape contractor.

PART 3. IRRIGATION SCHEDULING

Attach parameters for setting the irrigation schedule on controller per ordinance Section 492.10.

PART 4. SCHEDULE OF LANDSCAPE AND IRRIGATION MAINTENANCE

Attach schedule of Landscape and Irrigation Maintenance per ordinance Section 492.11.

PART 5. LANDSCAPE IRRIGATION AUDIT REPORT

Attach Landscape Irrigation Audit Report per ordinance Section 492.12.

PART 6. SOIL MANAGEMENT REPORT

Attach soil analysis report, if not previously submitted with the Landscape Documentation Package per ordinance Section 492.5.

Attach documentation verifying implementation of recommendations from soil analysis report per ordinance Section 492.5.

APPENDIX E

City of Winters Master Tree List

City of Winters

Master Street Tree List

Botanical Name	Common Name	Size	Crown Diameter (ft)	Evergreen	Flowering	Drought Resistant	Growth Rate	Street Tree
<u>Acer buergeranum</u>	Trident Maple	M	30				M	X
<u>Acer campestre</u>	Hedge Maple	S	30				M	X
<u>Acer freemanii</u>	Maple, 'Autumn Blaze'	L	50				M	X
<u>Acer platanoides</u>	Easy Street Maple, 'Ezestre'	M	20				M	
<u>Acer rubrum</u>	Maple, 'October Glory'	M	30				M	X
<u>Acer truncatum x plat.</u>	Pacific / Norwegian Sunset Maple	M	25				M	
<u>Arbutus undeo</u>	Strawberry Tree, 'Marina'	S	20	X	X		M	X
<u>Brachychiton populneus</u>	Bottle Tree	L	60	X	X		M	X
<u>Carpinus betulus</u>	European Hornbeam	M	40				M	X
<u>Cedrus deodara</u>	Deodar Cedar	L	30	X		X	M	X
<u>Celtis australis</u>	European Hackberry	L	35				M	X
<u>Ceratonia siliqua</u>	Carob	M	25	X			M	X
<u>Cercidium x 'Desert Museum'</u>	Desert Museum Palo Verde	M	25	X		X	M	
<u>Cercis reniformis</u>	Redbud, 'Oklahoma'	S	20		X		S	X
<u>Chilopsis linearis</u>	Desert Willow	S	20		X	X	M	X
<u>Cornus controversa</u>	Giant Dogwood	M	30				S	
<u>Diospyros virginiana</u>	Persimmon (male clones)	M	20				M	
<u>Fraxinus americana</u>	White Ash, 'Autumn Purple'	L	35				M	X
<u>Fraxinus americana</u>	White Ash, 'Chicago Regal'	L	35				M	X
<u>Ginkgo biloba</u>	Ginkgo, 'Autumn Gold' (male clones)	L	30				S	X
<u>Gymnocladus dioica</u>	Kentucky Coffee Tree (male clones)	L	30				M	X
<u>Koelreuteria bipinnata</u>	Chinese Flame Tree	M	30		X		M	X
<u>Koelreuteria elegans</u>	Formosan Flame Tree / Flamegold	M	25				M	
<u>Koelreuteria paniculata</u>	Goldenrain Tree	M	30		X		M	X
<u>Lagerstroemia indica x L. fauri clones</u>	Crape Myrtle	S	20		X		M	X
<u>Laurus nobilis</u>	Grecian Laurel	M	25	X			S	X
<u>Liriodendron tulipifera</u>	Tulip Tree	L	30		X		F	
<u>Magnolia grandiflora</u>	Southern Magnolia	L	30		X		M	X
<u>Malus</u>	Flowering Crabapple, 'Snowdrift', 'Golden Raindrops'	S	20		X		M	
<u>Malus arnoldiana</u>	Arnold Crabapple	S	20		X		M	X
<u>Metasequoia glyptostroboides</u>	Dawn Redwood	L	25				M	
<u>Olea europaea</u>	Fruitless Olive, 'Swan Hill'	M	25	X			S	X
<u>Pinus canariensis</u>	Canary Island Pine	L	30	X			F	X
<u>Pistacia chinensis</u>	Chinese Pistache - Fruitless Varieties Only, 'Keith Davey' (male clones)	L	30				M	X

<u>Pistacia chinensis</u>	Chinese Pistache - Fruitless Varieties Only, 'Pearl Street', 'Red Push' (male clones)	L	30			M	X
<u>Platanus acerifolia</u>	London Plane, 'Bloodgood'	L	35			M	X
<u>Platanus acerifolia</u>	London Plane, 'Yarwood'	L	35			M	X
<u>Platanus orientalis</u>	Oriental Plane	L	35			M	X
<u>Platanus x hispanica</u>	London Plane, 'Columbia'	L	30			M	X
<u>Prosopis alba</u>	Colorado Mesquite, 'Colorado'	M	25	X		X	M
<u>Pyrus calleryana</u>	Pear, 'Trinity' and 'Chanticleer'	M	20		X		F
<u>Quercus agrifolia</u>	Coast Live Oak	L	35	X		X	M X
<u>Quercus buckleyi</u>	Texas Red Oak	L	35			X	M X
<u>Quercus douglasii</u>	Blue Oak	L	35			X	S X
<u>Quercus frainetto</u>	Oak, 'Forest Green'	M	35			X	M X
<u>Quercus ilex</u>	Holly Oak	L	35	X			M
<u>Quercus lobata</u>	Valley Oak	L	35			X	M X
<u>Quercus robur</u>	English Oak	L	35				M X
<u>Quercus shumardii</u>	Shumard Red Oak	L	35			X	M X
<u>Quercus suber</u>	Cork Oak	L	35	X		X	M X
<u>Quercus virginiana</u>	Southern Live Oak	L	35	X			M
<u>Quercus wislizenii</u>	Interior Live Oak	L	35	X		X	M X
<u>Sequoia sempervirens</u>	Coast Redwood	L	25	X			F X
<u>Syringa reticulata</u>	Ivory Silk Japanese Tree Lilac	M	20		X		M
<u>Taxodium distichum</u>	Montezuma Bald Cypress	L	30				M X
<u>Tilia cordata</u>	Littleleaf Linden	M	30				M X
<u>Ulmus parvifolia</u>	Chinese Elm, Upright Varieties, 'Athena', 'Allee'	L	30				F X
<u>Ulmus wilsoniana</u>	Hybrid Elms, 'Frontier', 'Prospector', 'Accolade', 'Pioneer'	M	25				M X
<u>Vitex agnus-castus</u>	Chaste Tree	S	20		X	X	S X
<u>Xylosma congestum</u>	Shiny Xylosma	S	20	X			F
<u>Zelkova serrata</u>	Zelkova, Green Vase, Utility cut	L	35			X	M X

Crown Diameter:

If the sun were directly above the tree, the crown diameter would be the width of the shade pattern. Estimate at full growth (about 15 years).

Size (small, medium, large):

Estimated height at maturity. May vary due to soil, climate, and other growing conditions.

Small = 15 to 25 feet

Medium = 25 to 40 feet

Large = More than 40 feet

Growth Rate (slow, moderate, fast)

Estimated growth rate per year. May vary due to soil climate, and other growing conditions.

Slow = 18 inches or less

Moderate = 18 to 30 inches

Fast = More than 30 inches

Street Tree:

Trees not marked Street Tree should not be planted in parkways or street easements.